

PATENT COOPERATION TREATY

PCT

COMMUNICATION OF
INTERNATIONAL APPLICATIONS

(PCT Article 20)

From the INTERNATIONAL BUREAU

To:

United States Patent and Trademark
Office
(Box PCT)
Washington D.C. 20231
United States of America

Date of mailing:

21 September 1995 (21.09.95)

in its capacity as designated Office

The International Bureau transmits herewith copies of the international applications having the following international application numbers and international publication numbers:

International application no.:

PCT/GB95/00181

International publication no.:

WO95/21317

**CORRECTED VERSION
VERSION CORRIGEE**The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer:

J. Zahra

Telephone No.: (41-22) 730.91.11

Form PCT/IB/349 (July 1992)

856180

PATENT COOPERATION TREATY

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

United States Patent and Trademark
Office
(Box PCT)
Washington D.C. 20231
United States of America

in its capacity as elected Office

Date of mailing (day/month/year) 22 September 1995 (22.09.95)	
International application No. PCT/GB95/00181	Applicant's or agent's file reference LBN/P81281 WO
International filing date (day/month/year) 30 January 1995 (30.01.95)	Priority date (day/month/year) 04 February 1994 (04.02.94)
Applicant DEFOURNY, Paul, Marie, Joseph, Louis, Vincent, Ghislain et al	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:
24 August 1995 (24.08.95)

☐ in a notice effecting later election filed with the International Bureau on:

2. The election ☒ was

☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer

H. Zhou

Telephone No.: (41-22) 730.91.11

PCT

REC'D 24 APR 1996

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

PCT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference LBN/P81281 WO	FOR FURTHER ACTION See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/GB 95/ 00181	International filing date (day/month/year) 30/01/1995	Priority date (day/month/year) 04/02/1994
International Patent Classification (IPC) or national classification and IPC E21B17/05		
Applicant DB STRATABIT SA et al.		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.



2. This **REPORT** consists of a total of 4 sheets, including this cover sheet.

☒ This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

- These annexes consists of a total of 7 sheets.

3. This report contains indications and corresponding pages relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☒ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☐ Certain defects in the international application
- VIII ☐ Certain observations on the international application

Date of submission of the demand 24/08/1995	Date of completion of this report 22.04.96
Name and mailing address of the IPEA/  European Patent Office D-80298 Munich Tel. (+49-89) 2399-0, Tx: 523656 epmu d Fax: (+49-89) 2399-4465	Authorized officer  G. Hedemann Telephone No.

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

I. Basis of the report

1. This report has been drawn up on the basis of (Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments.):

☐ the international application as originally filed.

☒ the description, pages 1-27 _____, as originally filed,
pages _____, filed with the demand,
pages _____, filed with the letter of _____,
pages _____, filed with the letter of _____,

☒ the claims, Nos. _____, as originally filed,
Nos. _____, as amended under Article 19,
Nos. _____, filed with the demand,
Nos. 1-46 _____, filed with the letter of 19/01/96,
Nos. _____, filed with the letter of _____,

☒ the drawings, sheets/fig 1/20-20/20 _____, as originally filed,
sheets/fig _____, filed with the demand,
sheets/fig _____, filed with the letter of _____,
sheets/fig _____, filed with the letter of _____.

2. The amendments have resulted in the cancellation of:

☐ the description, pages _____.
☐ the claims, Nos. _____.
☐ the drawings, sheets/fig _____.

3. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

4. Additional observations, if necessary:

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

Intern. application No.
PCT/GB95/00181

IV. Lack of unity of invention

1. In response to the invitation to restrict or pay additional fees the applicant has:

- ☐ restricted the claims.
- ☒ paid additional fees.
- ☐ paid additional fees under protest.
- ☐ neither restricted nor paid additional fees.

2. ☐ This Authority found that the requirement of unity of invention is not complied with and chose, according to Rule 68.1, not to invite the applicant to restrict or pay additional fees.

3. This Authority considers that the requirement of unity of invention in accordance with Rules 13.1, 13.2 and 13.3 is

- ☐ complied with.
- ☐ not complied with for the following reasons:

4. Consequently, the following parts of the international application were the subject of international preliminary examination in establishing this report:

☒ all-parts.

☐ the parts relating to claims Nos. _____

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step and industrial applicability; citations and explanations supporting such statement

1. STATEMENT

Novelty (N)	Claims 1-46 _____	YES
	Claims _____	NO
Inventive Step (IS)	Claims 1-46 _____	YES
	Claims _____	NO
Industrial Applicability (IA)	Claims 1-46 _____	YES
	Claims _____	NO

2. CITATIONS AND EXPLANATIONS

1. The document US-A-4261425 discloses the preamble of claim 1 whereas document US-A-4904228 discloses the preamble of claim 32. The problem underlying the invention is to provide a drill bit or a subassembly which is dynamically more stable and drill a less eccentric hole.

This problem is solved by the characterizing features of independent claims 1 and 32.

An apparatus for simulating drilling according to independent claim 42 and the use of such an apparatus in simulating downhole drilling conditions has not been disclosed in any of the cited documents.

CLAIMS

1. Apparatus for a drill bit which is suitable for use in drilling, coring or removing material from a geological subsurface formation, which apparatus comprises a first member (21) for attachment directly or indirectly to a drill string and a second member (22) carrying or constituting at least one means for drilling, said first member (21) being in torque and weight transmitting relation with said second member (22), characterized by means (25) allowing tilting of or lateral movement of said first member (21) relative to said second member (22).

2. Apparatus according to Claim 1, in the form of a sub-assembly (2001,2002) for incorporation within a drill bit.

3. Apparatus according to Claim 2, wherein a drill bit body (2020) is integral with the second member (2002) with said first member (2001) constituting a drive shank of the drill bit.

4. Apparatus according to Claim 1, wherein said first member (21) constitutes the shank of a drill bit, and said second member (22) constitutes a drill bit body which carries at least one means (23) for drilling.

5. Apparatus according to Claim 1, wherein said means (25) allows free relative tilting or lateral movement of said first and second members in any direction.

6. Apparatus according to any one of Claims 1 - 5 wherein said means (25) for allowing relative tilting or lateral movement of said first and second members comprise elastically or resiliently deformable means.

7. Apparatus according to any one of Claims 1 - 6, including means (46) for holding said first and second members

(41,42) together and for transferring torque and weight from said first to said second member.

8. Apparatus according to Claim 1 or Claim 6, wherein said second member (32) is tiltable with respect to said first member (31) against compressible means (35) between said first and second members.

9. Apparatus according to Claim 1 wherein said first and second members (41,42) have a cooperating passage (412) therein.

10. Apparatus according to Claim 9 which comprises compressible sealing means (45) between said first and second members to prevent escape of fluid from said passage (412) between said members.

11. Apparatus according to Claim 7 wherein said holding means and torque transfer means together comprise at least one elongate member (36) passing through said second member (32) and engaging in at least one recess or slot (37) in said first member (31).

12. Apparatus according to Claim 7 wherein said torque transfer means comprises grooves or recesses (617) in one of said first and second member (61,62) engaging corresponding gear components (618) in the other of said first and second members.

13. Apparatus according to Claim 12 wherein said holding means comprises a threaded locking ring (619) surrounding said first member (61) and engaging threads (620) on said second member (62).

14. Apparatus according to Claim 9 which comprises a first member having a first elongate conduit (812) therethrough cooperating with conduit means in said second

member (82), said first conduit and said second conduit means being in fluid contact by way of a flexible pipe (825).

15. Apparatus according to Claim 9, wherein fluid passage means (3004,3005) is provided through said first member (3001), and wherein conduit extension means (3006) are provided at outlet ends of said fluid passage means (3005) on said first member to extend through said second member so as to discharge fluid below the second member without exerting a downward fluid force thereon.

16. Apparatus according to Claim 1 or Claim 5 or Claim 6 wherein said first member constitutes a drill bit body (112) and said second member constitutes at least one means (114) for cutting, which is carried by the drill bit body (112).

17. Apparatus according to Claim 16 wherein said cutting means comprises at least one cutter (114) which is tiltable with respect to said drill bit body (112).

18. Apparatus according to Claim 17 wherein said cutter (114) is adhered to said drill bit body (112) by an elastomeric spacer (113).

19. Apparatus according to Claim 17 wherein said cutter (124) comprises a stud, which is in a socket (1250) in said drill bit body with means (1259,1260) to restrain removal of said stud from said socket, and at least one spacer (1261) allowing tilting of said cutter with respect to said drill bit body.

20. Apparatus according to Claim 19 wherein said socket (1362) is in a separate member from said drill bit body (132), said member itself being in a hole (1363) in said drill bit body (132).

21. Apparatus according to Claim 19 wherein said restraining means comprises an elastomeric stud catcher (1463) in a socket (1450) which is of outwardly decreasing diameter.

22. Apparatus according to Claim 8 or Claim 10 wherein said compressible means comprises an elastomeric spacer (35,45) between at least part of said first and second members (31,32; 41,42).

23. Apparatus according to Claim 22 wherein said elastomer is at least one of a hydrogenated nitrile rubber, a nitrile rubber and a polyurethane, and has a Shore A hardness of at least 80.

24. Apparatus according to Claim 22 wherein said spacer comprises an elastomer derived from a settable liquid set in situ.

25. Apparatus according to Claim 22 wherein said spacer is a preformed ring or gasket.

26. Apparatus according to Claim 22 wherein said spacer is a layered body with at least one layer of elastomer and at least one layer of metal.

27. Apparatus according to Claim 18 or Claim 22 wherein said spacer is at least 0.3 mm thick.

28. Apparatus according to Claim 8 or Claim 10 wherein said compressible means comprises a hollow body (932) adapted to contain a compressible fluid.

29. Apparatus according to Claim 28 wherein said compressible means (932) is adapted to provide torque transfer means between said first and second members (91,92).

30. Apparatus according to any one of Claims 1 - 6 or Claim 15 wherein said second member is tiltable relative to said first member against a hollow cylinder or spring.

31. Apparatus according to Claim 1 wherein said means (25) is adapted to allow tilting of up to 15 degrees.

32. A drill bit including apparatus according to any one of Claims 1 - 7 or Claim 16.

33. A drill bit including at least one apparatus according to any one of Claims 2 - 4 together with an apparatus according to Claim 16.

34. A sub-assembly for incorporation in a drill string, said sub-assembly comprising a first member (2001) and a second member (2002) each for torque transmitting attachment to respective elements of the drill string to provide a rotary drive connection between those elements of the drill string, means (2007,2013,2014,2017) for transmitting weight and torque between the first and second members (2001,2002), and means (2004,2005,2016) for allowing tilting or lateral movement of said first member (2001) relative to said second member (2002) freely in any direction.

35. A sub-assembly according to Claim 34 wherein said weight and torque transmitting means including a series of radial teeth (2013) on said first member (2001) which loosely engage in corresponding recesses (2014) in said second member (2002), with the radially outer surfaces (2016) of the teeth (2013) and the opposed base surfaces of the recesses (2014) being shaped to allow said relative tilting or lateral movement of said first and second members (2001,2002).

36. A sub-assembly according to Claim 35 wherein said means for allowing relative tilting or lateral movement of

said first and second members (2001,2002) include elastically or resiliently deformable means (2004,2005).

37. A sub-assembly according to Claim 34 wherein said second member (2021) is formed with connector means (2021) for attachment thereto of a shank (2023) of a drill bit (2022).

38. A drill string including at least one sub-assembly according to any one of Claims 34 - 37.

39. The combination of a drill string according to Claim 38 and a drill bit, wherein at least one sub-assembly is disposed at a position spaced at a distance above the drill bit (2020).

40. The combination of a drill string according to Claim 38 and a drill bit according to Claim 32 or Claim 33.

41. A method of drilling, coring or removing material from a geological subsurface formation using a drill bit according to Claim 32 or Claim 33, or a drill string according to Claim 38 or a combination of a drill string and a drill bit according to Claim 39 or Claim 40.

42. An apparatus for simulating drilling which comprises (a) at least one rigid rotatable body (192) connected directly or indirectly to (b) a drill bit (195) for contacting a simulated bottom hole surface, and (c) means (191) for rotating said body and bit, wherein at least one of (a) and (b), and (a) and (c), is separated by a flexible connector (194).

43. An apparatus according to Claim 42 which comprises at least two rigid bodies (a) (192,193) spaced from one another and from (b) and (c) by flexible connectors (194).

44. An apparatus according to Claim 42 wherein said body (a) (192) is a rigid cylinder threaded to a correspondingly threaded flexible connector (194).

45. An apparatus according to Claim 42 wherein said flexible connector comprises two plates each carrying a thread adapted to engage a rigid cylinder, said plates being separated by a flexible member.

46. An apparatus according to Claim 42 which also comprises a simulated bore hole comprising at least one bore member having a bore in which said rigid body (192) can rotate.

47. An apparatus according to Claim 42 which has one of its natural frequencies not greater than 10 Hz, preferably not greater than 1 Hz.

48. An apparatus according to Claim 42 which comprises an axial passage through all of said rotatable bodies (192,193), flexible connectors (194) and the drill bit (195).

49. A method of simulating downhole drilling conditions of a specific downhole location utilizing an apparatus according to Claim 36, including testing scale versions of downhole equipment to be used at said downhole location in said apparatus and altering the design of the equipment as necessary, in order to reach an optimized design of such equipment, and using the optimized design for the corresponding equipment to be used in practice at said downhole location.

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

Therefore the subject-matter of claim 6 is also not inventive.

2.3. The subject-matter of claim 3 is not directly derivable from the cited prior art and involves therefore an inventive step.

3. Industrial applicability.

The industrial applicability of the content of claims 1 to 6 is evident (article 33(4) PCT).

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :

E21B 17/05, 4/00, 10/62

A2

(11) International Publication Number:

WO 95/21317

(43) International Publication Date:

10 August 1995 (10.08.95)

(21) International Application Number: PCT/GB95/00181

(22) International Filing Date: 30 January 1995 (30.01.95)

(30) Priority Data:

9402216.7

4 February 1994 (04.02.94)

GB

(71) Applicant (for all designated States except US): DB STRATABIT S.A. [BE/BE]; 74, avenue du Pont-de-Luttre, B-1190 Brussels (BE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): DEFOURNY, Paul, Marie, Joseph, Louis, Vincent, Ghislain [BE/BE]; 50, rue Bois-du-Breucq, B-7110 La Louviere (BE). ABBASSIAN, Fereidoun [GB/GB]; Flat 2, 126 Goldhurst Terrace, London NW6 3HR (GB).

(74) Agent: BEN-NATHAN, Laurence, Albert; Urquhart-Dykes & Lord, 91 Wimpole Street, London W1M 8AH (GB).

(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ).


Published

Without international search report and to be republished upon receipt of that report.

(54) Title: DRILLING BIT ASSEMBLY AND APPARATUS

(57) Abstract

A drill bit comprises a shank member (31), a bit body (32) provided with cutters (33) and flexible material (35) between the shank (31) and the bit body (32) allowing relative tilting movement therebetween to reduce adverse effects caused by vibration of the bit. In other embodiments, flexible material is provided between the bit body and the cutters. In further embodiments, the flexible material may be provided in a tiltable sub-assembly for incorporation in a drill-string above the drill bit. An apparatus for simulating drilling conditions is also provided.

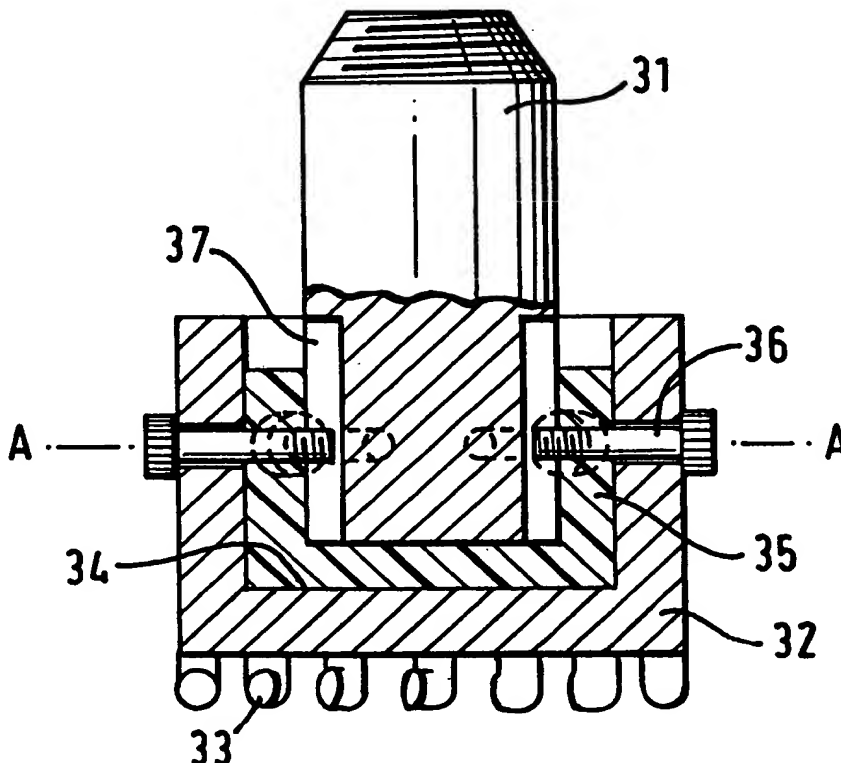

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

DRILLING BIT ASSEMBLY AND APPARATUS

This invention concerns drill bit assemblies for drilling, coring or removing material from a geological subsurface formation.

Such drill bits have cutters which are either rigidly mounted on the bit body or on an extension of that body, e.g., blades or studs in the body, or may be mounted on roller cones which can rotate around axles rigidly fixed to the bit body. On the side of the drill bit usually distant from the cutters, such drill bits have a connector, usually threaded, which allows a rigid connection to be made between the bit and the bottom hole assembly and hence the drill string. In use the bit rotates and moves up and down. Eventually the bit is worn out or prematurely broken.

The replacement of a bit involves high cost in lost time as well as the cost of the new physical equipment. The problem of breakage of bits is thus very important in the drilling industry.

In relation to diamond faced bits for cutting or scraping such as diamond faced studs or faces, especially polydiamond crystal (PDC) wafer facing, the cutter comprising the diamond facing may become prematurely broken or dislodged. One reason for the breakage of PDC bits is that caused by vibration of the bit on the end of the very long drill pipe, the vibration resulting e.g. from interaction of the bit and the formation, or of the drill string and the well bore, and causing motion of the bit, which is not concentric nor at uniform speed, e.g. causing slip-stick, bit whirl and bit bounce.

Antiwhirl bits have been described and used in which the cutters are not uniformly distributed around the bit; in at least one place instead of a cutter there is a frictionless pad, the effect of which is that on contact of it and the rock, the bit slides over the rock surface instead of gearing with it. Although antiwhirl bits have in some cases enabled PDC bits to drill into harder formations, they have been less

successful in highly interbedded formations, e.g. when drilling through rocks of variable or different hardness, which results in vibration of the bit. This problem is especially acute with exploratory wells where the nature of the rocks and the location of their interfaces is not accurately known. Because the cutters are in contact with different rocks, the resultant side force on the bit can no longer be maintained within the low friction pads so the low friction pads of the antiwhirl devices lose their effectiveness. There is thus vibration, an eccentric hole and breakage/dislocation of the cutter.

It is known to provide drill strings for driving drill bits having rotary drive transmitting sections which can be moved relative to one another from an axially aligned disposition in order to allow entering and drilling horizontal well sections, through a short radii curved hole, that would require excessive bending of a conventional stiff drill string. This may be achieved for example by providing hinged driving joints between the two sections or between the lower end of the drill string and the drill bit, or by providing wall sections which can be readily deformed to accommodate angular changes in the drilling direction. As the purpose of those devices is to cope with an important hole curvature, the drill bit itself is left rigid, in accordance with conventional bit designs.

EP-A-0,225,101 is concerned with reducing the problem of overheating of drill bits caused by excessive weight-on-bit during drilling or by sudden overload. This is achieved by a bit body having at least two relatively movable structures each carrying cutting elements, the two structures being relatively movable between two limiting positions to allow a change in configuration of the bit to be effected when required. In some embodiments resilient means may be provided to oppose relative movement of the structures in an axial and/or rotational direction. However there is no teaching or suggestion in this specification of providing any means for allowing tilting or relative lateral movement of the two

relatively moveable structures of the drill bit assembly of EP-A-0,225,101.

A first object of the invention is to provide means incorporated in, or for incorporation in, a drill bit itself to enable the drill bit to operate in a dynamically more stable manner and to be used to drill a less eccentric hole for a longer period without breakage or dislocation of the cutter, or breakage to the bit itself.

Another object of the invention is to provide an improved sub-assembly for use in a rotary drive system for a drill bit, which also enables a dynamically more stable operation of the drill bit.

A further object of the invention is to provide an apparatus for simulating drilling to determine optimum drilling parameters.

The present invention provides apparatus for a drill bit which is suitable for use in drilling, coring or removing material from a geological subsurface formation, which apparatus comprises a first member for attachment directly or indirectly to a drill string and a second member carrying or constituting at least one means for drilling, said first member being in torque and weight transmitting relation with said second member, characterized by means allowing tilting of or lateral movement of said first member relative to said second member. The invention also includes a method of drilling, coring or removing material from a geological subsurface formation using a drill bit assembly incorporating such apparatus.

In some embodiments the apparatus may be in the form of a sub-assembly for incorporation within said drill bit.

In other embodiments, the first member may constitute the shank of the drill bit, and said second member may carry at least one means for drilling.

The means for allowing relative tilting or lateral movement of the first and second members may comprise elastically or resiliently deformable means and may allow such relative movements freely in all directions.

In some constructions according to the invention there may be provided means for holding said first and second members together and for transferring torque and weight from said first to said second member.

The first member and second member may be of any cross section e.g. square, rectangular, hexagonal or other polygonal, but are preferably rounded such as elliptical but are especially of substantially circular cross section. The members may be of 13 - 762 mm (0.5 - 30 inch) e.g. 102 - 445 mm (4 - 17.5 inch) diameter. The first member may be the part of the bit which is to be joined to the bottom hole assembly, and hence to the drill string; the join to the bottom hole assembly may be direct or via a motor. The join is preferably via threads on the first member and bottom hole assembly, especially male threads on the first member engaging with a threaded recess in the bottom hole assembly. The first and second member are usually of metal such as steel, or brazing alloys, or of tungsten carbide and may be of lighter or heavier gauge than the drill pipe, which connects it to the rotation means at the drilling rig. Each of the first and second members may be solid, but is usually hollow or has a passage parallel to or along its longitudinal axis; especially both have a passage which cooperates to allow flow of drilling fluid from the drill pipe through said members towards the drill means, and, especially the second member, may incorporate one or more surface holes or nozzles for ejecting this fluid.

The second member may be of the same steel or other ferrous metal as the first member, or may be of matrix material and may have been moulded directly to the desired shape. The second member may carry the drill means. The bit profile may be rectangular, e.g. flat, or curved, e.g. hemispherical or single- or double-parabolic.

The second member may be the part of the bit on which the drill means is mounted. The drill means may be a means for compression fracturing of the material to be drilled and/or scraping, abrading or cutting that material. Among suitable

drill means are roller cones and cutters such as PDC wafers; for convenience the drill means will hereafter be exemplified by a cutter, though similar approaches apply with other drill means (unless otherwise stated). The cutters may be arranged uniformly or non uniformly on the surface of that member distant from the side near said first member. The said side of the second member, on which the cutter(s) are mounted, may be convex rather than concave, or may be protrusions of this second member. The said protrusions may be an integral part of the said second member, in which case they will usually resemble blades, or they may be rotatable roller cones. The said protrusions may be disposed radially and straight, or radial and curved in plan view or in other dispositions. Each cutter or contact point of the drill means is preferably made of hard material, e.g. tungsten carbide or tungsten carbide reinforced with diamond or PDC wafer; the wafer may be up to 3 mm, e.g. 0.5 - 2.5 mm thick, while a stud carrying the wafer supported by the hard material may be of 10 - 50 mm, such as 15 - 25 mm diameter. The said cutter or contact point may be directly or indirectly (using a stud), rigidly or flexibly mounted on the said surface of the second member. When a stud is used, it may be of tungsten carbide as commonly used. The outer wafer edge is the cutter edge and may extend along all of one side of the stud. When one of the cutter orientations needs to be maintained, a keying device which secures only that orientation can be present or the stud can be pre-shaped such that this orientation will be secured, e.g. with an elliptical cross section.

The first member is rotated by the drillpipe and in turn rotates the second member, the torque being transmitted from the first to second member. The same component of the assembly may provide both the holding and the torque transmission means, or separate components may be used for each of these means. Thus this component of the assembly may lock the first to the second member, against relative movement in any direction and therefore provide the holding means, and also provide the torque transfer means while allowing tilting

of the cutters with respect to second member; in this form, the first and second members may if desired be integral. Alternatively this component of the assembly may lock the first and second member against relative movement in the axial direction but allow relative movement in an angular (i.e. twisting) direction in which case a separate torque transmission means is required. The holding means keeps the first and second members together and usually transmits the weight from the drill string to the second member, to provide the weight on bit (WOB). The transmission means may comprise at least one elongate member, e.g. a pin or bolt extending through said second member to engage at least one groove or slot in said first member; if desired the locations of the pin and groove/slot in the first and second members may be reversed. The transmission means may also comprise a cooperating pair of a radial extension or extensions, e.g. star or gear shaped, and a corresponding groove(s) or recess(es), one on each of the first and second members. In the case of this cooperating pair, the first and second members are preferably held together with the aid of a threaded locking ring, which engages threads on the second member, e.g. internally facing threads, and bears against or towards at least one corresponding projection or outwardly extending ridge on said first member. Other corresponding pairs of interacting components on the first and second members may be used, e.g. other cranked or polygonally shaped components and recesses to provide the torque transmission means.

The means allowing tilting may be in relation to the first and second members, with the drill means fixed relative to the latter, and in this case the drill means may be cutters or roller cones; preferably the means allowing tilting is between said first and second members. The means allowing tilting may be in relation to the second member and the cutter, with the first member fixed relative to the former and in this case the drill means are preferably cutters and not roller cones; preferably the means allowing tilting is between

said second member and cutters. The means allowing tilting may also be between all three, i.e. between first and second members and the cutter. The angle of tilt may be up to 15°, such as 1 - 15°, preferably 4 - 10°.

The extent of possible tilting between the first and second member, or second member and cutter, may be until they come into contact with each other thereby restricting further tilting, but preferably further tilting before contact is restricted by a tilt restriction means. The latter may allow some free tilting when the assembly is at rest (when no load is applied), as well as when it is in use, but preferably the tilt restriction means is a medium which provides some stiffness (resistance) against tilting movement, the stiffness being less than that of the first or second member.

The first and second member, or the second member and cutter, may be capable of small lateral or transverse movement relative to one another, e.g. lateral movement of first and second members of less than five hundredth of the bit diameter. Thus the rotating axis of the second member may be capable of lateral movement relative to that of the first member, as well as or instead of the capacity for tilting movement when the first and second members are tiltable. Some axial movement of the first and second members may also occur, but only in association with lateral or tilting movement. The present specification describes further the tiltability features and the assemblies suitable for providing it, but the same general principles apply as well to the lateral movement feature; preferably the means allowing tilting is present in the assembly of the invention with means allowing lateral movement optionally present.

In some embodiments of the invention, the second member may be tiltable with respect to said first member to allow relative pivotal movement, but not axial movement. The first and second members are spaced apart but held together, though preferably the degree of tilt is restricted by tilt restricting means, which is preferably present in the space between the members. The tilt restricting means may be at

least one elastomeric spacer, e.g. of uniform or non uniform thickness such as at least 0.2 mm or 0.3 mm or 1 mm thick, such as 0.2 - 5 mm or 1 - 3 mm thick restricting tilt and 0 - 0.5 mm, e.g. 0.1 - 0.3 mm thick restricting torque. Increasing bit diameters allows thicker tilt restriction means, e.g. up to 10 mm.

The spacer is usually such that the first member can tilt relative to the second member against the resistance of the elastomeric spacer. This approach in general applies whatever the nature of the torque transfer means, e.g. as described above. The spacer may extend axially (i.e. parallel to the longitudinal axis of the bit) when the torque transfer means comprises also the means for holding the first and second members together, but may extend radially (i.e. normal to the longitudinal axis of the bit) when the torque transfer means does not so hold said members, e.g. when a locking ring is also needed, as described above; preferably the spacer extends both axially and radially. When the tilt restricting means allows tilt under no applied load, there is still a gap between the spacer and at least one of the members. However said means preferably allows substantially no tilt at rest so the spacer contacts both members, but allows freedom to tilt when the assembly is in use, e.g. because of the compressibility of the spacer, so the two members are pivotally movable in use under applied load.

The first and second members may each have an elongate conduit through it, the two conduits cooperating to allow flow of drilling fluid; if it is desired not to allow any leakage of said fluid through said gap between the members, then preferably a flexible pipe, e.g. a reinforced pipe of plastic materials extends through said conduits to provide the desired fluid passage. Otherwise the gap may comprise sealing means, which may also be the elastomeric spacer.

In other embodiments of the invention, at least one cutter constituting said second member, and especially all said cutters may be tiltable with respect to said first member, e.g. constituted by the drill bit. The cutter may be

adhered to the first member with an elastomer which also provides the spacer. The cutter may be mounted on a stud which is in a hole or socket in said first member, and adhered thereto with a layer of adhesive to restrain the stud from removal of the hole or socket and provide the facility for tilting; other restraining means may be used. Such restraining means include cooperating combinations of grooves and ridges or projections or other bearing surfaces in the stud and hole/socket, with optional assistance of at least one ball and or spring, or an elastomeric stud catcher or the hole or socket may be of outwardly decreasing cross section (especially in combination with the stud catcher). In relation to use of the other restraining means, there may also be at least one elastomeric spacer, e.g. an O-ring, which may be friction fitted on the stud or in the hole or socket or at least partly received in grooves in the stud or hole or socket. If desired the hole or socket may not have been formed e.g. by drilling in the first member, but may be formed e.g. by moulding a matrix material to form a sleeve for insertion into a preformed hole in the first member; the spacer may then be placed in the hole/socket with the stud and the entire body (i.e. the sleeve with spacer and stud) then inserted into the first member.

The spacer may be elastomeric. It may be formed in situ from a liquid settable material which cures to an elastomer, such as an epoxy or polyurethane resin. The components of the assembly on either side of the intended spacer may be joined together mechanically or placed in the desired place relative to one another and then the liquid poured into place, with the optional aid as desired of a plug for a central passage in the first and second member and/or a ledge or trough outside the two members to aid transfer of the liquid into the space between the two members. In the case of the cutter, the liquid may be poured into the hole or socket and then the cutter or stud carrying the cutter inserted into the uncured material. The liquid may be inserted at atmospheric pressure, or higher or lower pressure, in order to obtain a prestressed

stage for the joint, to increase its strength for the high loading. The liquid polymerizes at room temperature, or higher if desired or necessary, to form an elastomer, usually one of compression modulus, which is up to 1000 times e.g. 100 - 1000 times lower than that of the material of the bit body, and may be $0.1 - 10 \times 10^9 \text{Nm}^{-2}$.

More than one elastomer may be used in different places in the spacer if desired, especially ones with different properties e.g. different moduli or adhesive/sealing characteristics; in this case the liquids would be poured and set in situ sequentially.

The elastomer may also be preshaped, especially for use in the space between the first and second members, or for example as stud catcher. The preshaped bodies may be as rings or squares or gaskets, or other bodies of complex geometry. Preferably for use with the studs, they are in the form of O-rings. The preshaped elastomeric material may be unfilled or filled with a solid additive e.g. alumina, and may be of the same compression modulus range as described above. Examples are epoxy resin, natural rubber, tetrafluorethylene polymers e.g. "TEFLON" polymers, "ERTALON", polyurethane and rubber elastomers such as styrene butadiene and neoprene rubbers as well as hydrogenated nitrile or standard nitrile rubbers. Use of the preformed shaped elastomeric spacers reduces the construction time by avoiding the time for polymerization and also allows for maintenance, repair or reuse of the spacer.

Preferably the elastomer has a Shore A hardness of at least 80 to reduce extrusion under load and a compression modulus which is 0.1 or less e.g. 0.01 or less such as 0.001 - 0.1 of that of steel.

The elastomer may be used as such as the spacer, or may be in the form of a layered body with at least one elastomer layer, e.g. 1 - 4 layers, and at least one metal layer e.g. 2 - 5 layers; the layers may be bonded together if desired. In the case of gaskets or other preshaped bodies, the elastomer may be restrained from extrusion by a metal frame.

Instead of an elastomeric spacer allowing restriction of tilt in the Assembly, there may be used other materials for achieving that purpose, such as preshaped springs such as helical springs under compression, belleville springs or hollow springs or springs combined with a damper. Another form of the tilt restriction mechanism can involve a hollow elastic body e.g. a hollow cylinder such as a toroidal metallic body, or can involve a body e.g. an elastic body adapted to contain a compressible fluid, e.g. a gas such as air or an inert gas. The deflated body may be inserted at least partly in the space between the first and second members (or second member and cutter) and then may be filled with the fluid, e.g. inflated. If desired, the body may extend into grooves or recesses in one or both of the first and second bodies. The body may be in the form of a band, e.g. of reinforced rubber like a tyre or in the form of a tube, e.g. a torus. The inflation may be to a set pressure, or the pressure may be modifiable, e.g. to increase if the load increases either automatically or following instruction by an operator; pressure control means capable of achieving this are well known in the literature on downhole pressure control engineering. If the torque is low, and the pressure in the inflated body high then that body may act itself as the torque transmission means as well as the tilt restricting means.

The assemblies of the invention may be dynamically more stable than known bits without the tilting means, can rotate more smoothly and uniformly and have an increased lifetime due to reduction in the frequency of damage or dislocation of the cutters, especially when moving between formations of different or variable hardness.

The invention also provides a sub-assembly for incorporation in a drill string, said sub-assembly comprising a first member and a second member each for torque transmitting attachment to respective elements of the drill string to provide a rotary drive connection between those elements of the drill string, means for transmitting weight and torque between the first and second members, and means for

allowing tilting or lateral movement of said first member relative to said second member freely in any direction.

The invention further includes an apparatus for simulating drilling which comprises (a) at least one rigid rotatable body connected directly or indirectly to (b) a drill bit for contacting a simulated bottom hole surface, and (c) means for rotating said body and bit, wherein at least one of (a) and (b), and (a) and (c), is separated by a flexible connector. The invention further includes a method of simulating downhole drilling conditions of a specific downhole location utilizing such an apparatus, including testing scale versions of downhole equipment to be used at the downhole location in the apparatus and altering the design of the equipment as necessary in order to reach an optimized design of such equipment, and using the optimized design for the corresponding equipment to be used in practice at the downhole location. The invention further includes a method of simulating downhole drilling conditions of a specific downhole location utilizing such an apparatus.

The present invention is illustrated in the accompanying drawings in which:

Fig. 1 represents a cross-section of a known drill bit shown schematically;

Fig. 2 represents an axial cross-section through a schematic drill bit of the invention;

Figs. 3A/3B provides more detail of the bit of Fig. 2;

Figs. 4, 5, 6A, 7A, 8, 9, 10, 11, 12A and 12B represent respective axial cross-sections through other drill bits of the invention;

Figs. 6B, 7B and 7C, and 13 represent transverse sections along lines AA in Figs. 6A, 7A and 12A, respectively;

Figs. 12C and 12D represent axial cross-sections through sub-assemblies in accordance with another aspect of the invention for incorporation in drill strings for rotating drill bits which may or may not be in accordance with the invention;

Figs. 14 - 20 represent sketches showing schematically dispositions of cutters on studs in holes in the second members for use in drill bits according to the invention; and

Figs. 21 and 22 are respectively a schematic representation in longitudinal section of a test apparatus in accordance with the invention and a schematic detail of the drilling bit section of the apparatus, with Fig. 21A being a section along line A-A in Fig. 21.

Referring to schematic Fig. 1, a known drill bit has a shank 1 with a thread 8 for engaging a drilling string (not shown) and having set of cutters 3 rigidly mounted therein. The shank is integral part of the bit body so, when in use, the cutters are rigidly connected to the drill string.

Figure 2 shows schematically an inter relation between shank 21, bit body 22 and cutters 23, in which the bit body 22 has a mouth 24 containing a flexible matrix as spacer 25 into which extends shank 21. There is also shown to a distorted extent the position of shank 21 when the bit body 22 is tilted with respect to the shank, hence remaining in contact with the formation 25.

Figs. 3A/3B provides more detail on the bit assembly of Fig. 2, and has shank 31, bit body 32, cutters 33, mouth 34 and spacer 35, analogous to items 21 - 25 in Fig. 2. But Figs. 3A/3B also shows bolts or pins 36 rigidly fixed to and extending through bit 32. The bolts 36 enter longitudinal axis groove recesses 37 of shank 31 in order to enable transmission of torque from the shank 31 to bit body 32, but there is sufficient clearance between bolts 36 and recesses 37, so that coupled with the presence of elastomeric spacer 35 the bit body 32 is able to tilt or rotate up to 10° relative to shank 31. Fig. 3B shows a section AA of Fig. 3A illustrating the relative location of bolts 36 entering recesses 37 in shank 31. The clearance shown in Figs. 3A and 3B between bolts 36 and recesses 37 allows a small lateral movement of bit 32 relative to shank 31. A bit assembly according to Figs. 3A/3B of 40 mm diameter has been shown in laboratory tests to drill much more smoothly and more concentrically than a corresponding rigid assembly

according to Fig. 1. In the test the weight on bit (WOB) was slowly increased while the bit was rotated at constant speed. When the WOB was above a certain level, the bit vibrated so much that it did not remain in contact with the surface being drilled. In the test, this limiting WOB for the assembly of Figs 3A/3B was about 3.7 times than that for the assembly of

Fig. 1. Moreover the drilling with the Figs 3A/3B assembly ran much more smoothly than that with the Fig. 1 assembly.

Referring now to Fig. 4, the assembly comprises a hollow shank 41 separated from a hollow bit body 42 by a flexible cup shaped spacer 45 which has two radial parts 45A, 45B joined by an axial part 45C. Mounted on the bit body 42 distant from the shank 41 is a set of cutters 43, shown schematically. Shank 41 has screw thread 48 for engagement with drill pipe (not shown). Distant from said thread 48, the shank 41 has an inward ledge 49 leading to a nose 410 in which are disposed 6 circumferential recesses 47 (only one of which is shown for convenience). Bit body 42 has a hollow or mouth 44 generally adapted to receive nose 410 and a shoulder 411 to receive ledge 49 but in both cases separated therefrom by spacer 45. Bolts or pins 46 are rigidly fixed in and pass through bit body 42, and interact with recesses 47 to secure shank 41 to bit body 42 and allow torque to be transferred between them (in the manner shown in Fig. 3B), but also via interaction with spacer 45 to allow tilt movement of bit body 42 relative to shank 41, against the restriction of spacer 45. Pins or bolts 46 may be secured further in place by a welded belt (not shown).

Bit body 42, like shank 41, has an axial passage 412 for drilling fluid, and bit body 42 also has outlets 413 for that fluid. Cutters 43 are located on bit body 42 in an arrangement known per se e.g. on a double parabolic profile.

The clearance between all opposed surfaces of bit body 42 and shank 41 may be the same, but is preferably larger between axial surfaces than radial ones (as shown).

Fig. 5 shows an assembly the same as in Fig. 4 but with a plug 514 to seal axial passage 512 from the spacer 55

between bit body 52 and shank 51. Surrounding bit body 52 just below spacer 55 is a ledge ring or trough 515, which is used temporarily during construction of the assembly for directing a liquid elastomer between bit body 52 and shank 51 prior to its setting in situ to form an elastomeric spacer 55 and sealer.

Fig. 6A shows an assembly with an alternative to the separate bolts or pins 46 of Fig. 4 and Fig. 6B shows a section through the assembly of Fig. 6A. In Fig. 6A, there are a shank 61, bit body 62, cutters 63, thread 68, nose 610, mouth 64 and central passage 612, all equivalent to items 41, 42, 43, 48, 410, 44 and 412 of Fig. 4. Instead of separate pins 46 rigidly passing through bit body 42 and entering recesses 47, the present embodiment has inward facing teeth 616 integral with bit body 62 (and machined therein) and inward facing recesses 617 in bit body 62 which loosely mesh in the manner of gear cogs with corresponding recesses 67 and teeth 618 formed in shank 61. Between all the teeth and their recesses is an elastomeric spacer 65. A locking ring 619 surrounds shank 61 and has outward facing threads 620 which engage corresponding inward facing threads 621 on bit body 62. Ring 619 bears upon spacer 65 to lock bit body 62 onto shank 61 but allow tilting. In this embodiment bit body 62 and shank 61 are in direct contact, on one side of teeth 618 in an axial direction, but not on the other side, though (not shown) spacer 65 may separate bit body 62 and shank 61 from contact anywhere.

In Fig. 7A, there is also shank 71, bit body 72, cutters 73, thread 78, nose 710, mouth 74 and central passage 712, ring 719 and threads 720 and 721 all equivalent to items 61, 62, 63, 68, 610, 64, 612, 619, 620, 621 of Fig. 6. In this case instead of teeth 618 on shank 61, there is on shank 71 and extending circumferentially an outward facing ridge 722, which may be of gradually increasing diameter (as shown) or radial and is separated from locking ring 719 by spacer 75; this spacer provides the facility for tilting bit body 72 relative to shank 71. As shown in Fig. 7B and 7C, the torque

transfer mechanism comprises a series of loosely enmeshing cogs 723 and 724 of chamfered (Fig. 7B) or square (Fig. 7C) cross section and formed in the mouth 74 and nose 710 of the bit body 72 and shank 71 respectively. Space between the cogs 723 and 724 is at least partly filled with further elastomeric spacer 75.

Fig. 8 concerns a modification of the assembly of Fig. 7 in which a flexible reinforced elastomeric pipe 825 having an externally threaded lower member 826 and outwardly extending upper member 827 attached thereto is located in the central passage 812. The upper member 827 bears on a corresponding ridge in passage 812 and is sealingly held in place by a threaded ring 828 engaging threads 829 inside passage 812. The lower member 826 of the pipe 825 arrangement sealingly engages corresponding threads on the mouth 84 of bit body 82. Fluid moving through passage 812 is thus constrained to flow through the pipe 825 and not to leak past elastomeric spacers 85 in mouth 84. This assembly is useful when the drilling fluid is of high velocity and/or high pressure and prevents "wash out". Also (not shown) the flexible pipe 825 arrangement may be used in a modification of the assembly of Figs. 4 - 6, 10 or 11.

Fig. 9 shows a modified version of the embodiment of Fig. 8, which is adapted to obviate the exercise of high fluid force on the lower member 3002. With large size drill bits in particular, the rate of fluid flow can be so high as to exercise an excessive force on the lower member 3002 as well as on the flexible seal 3003. In this embodiment the upper member 3001 has a blind axial fluid passage 3004 having outlet bores 3005 formed at its lower end. Protruding pipes 3006 are provided on the upper member 3001 and form downward extensions of the outlet bores 3005. The pipes 3006 pass through holes 3007 formed in the lower member 3002 so as to distribute the fluid beneath the lower member 3002. The holes 3007 are preshaped in the lower member 3002 so as to provide enough clearance between the pipes 3006 and the lower member 3002 to

allow the lower member to tilt with respect to the upper member.

Fig. 10 shows an alternative method of providing the tilt facility and can be adapted also to transfer torque. Bit body 92 has two inward facing circumferential recesses 930 in the upper section of its mouth 94; recesses 930 are connected to the outside of bit body 92 by way of conduit 931, fitted with valve 931A. Intermeshing teeth and recesses 916 and 97 are located and perform as do members 616 and 67 in Fig. 6. Located in each of recesses 930 is a continuous flexible band 932 closed in an inward direction but open in an outward direction thereby forming a toroid with an outward opening 931; this band may if desired be reinforced e.g. with steel circumferential reinforcement (not shown). The inward face of band 932 bears on shank 91 when in use. To construct this assembly, bands 932 are located in their recesses 930, glued in place and then shank 91 is inserted into mouth 94. Then compressed gas e.g. air or inert gas is passed into band 932 through conduit 931 and valve 931A is closed. The pressurized band 932 enables bit 92 to be tiltable relative to shank 91. If desired (not shown) band 932 may be replaced by an inflatable tube to form a toroid. In both alternatives the pressure and the coefficient of friction between the band 932 and shank 91 may be adapted such that the band 932 may be used to transmit torque, and then it would be possible to reduce the number of teeth and recesses 916 and 97, or omit them completely.

Fig. 11 shows a schematic modification of the assembly of Fig. 6, in which locking ring 1019 bears upon an upper outer surface 1034 of a multi-layered gasket 1035 having external and internal metal rings or washer 1036 separated by elastomer layers 1037. An upper inner surface 1038 of the gasket 1035 bears upon an inwardly extending surface 1039 of shank 101. The gasket 1035 is locked in place on the nose 1010 of shank 101 by shank locking ring 1040 which bears upon the lower inner surface 1041 of gasket 1035. Lower outer surface 1042 of gasket 1035 bears upon an outwardly extending ledge 1044 in

mouth 104 of bit body 102. Sealing rings e.g. O-rings 1043 are provided above and below upper and lower outer surfaces 1039 and 1042. Torque transfer means (not shown) may be as in Figs. 4 - 10 but having the interaction between each opposing face and the corresponding shank 101 and bit body 102 rather than e.g. shank 41 and bit body 42. Instead of horizontal rings 1036 to reinforce the elastomer layers 1037 there may be used vertical metal tubes (not shown) separated by elastomer layers 1037 but having in this case no tube extending completely between opposing faces of the gasket so that are elastomeric layers between the tube and the external surfaces 1034, 1038, 1041 and 1042.

Figs. 12A and 13 show a further embodiment in the form of a sub-assembly for incorporation at a selected position in a drill bit assembly or a drill string. The sub-assembly comprises an upper body 2001 having a threaded shank connector portion 2009 for attachment directly or indirectly to a drill string, and a lower body 2002 having a connector portion 2010.

The sub-assembly may be incorporated in the drill bit as an integral part of the drill bit as illustrated in Fig. 12B. In this embodiment, the drill bit 2020 is made an integral part at the lower end of the lower body 2002 and the upper body 2001 constitutes the drive shank of the drill bit. Fig. 12C shows an embodiment in which the lower end of the lower body 2002 is formed with a taper threaded recess 2021 to receive the tapered threaded shank 2023 of any suitable bit 2022. Fig. 12D shows the sub-assembly of Fig. 12C but incorporated in the drill string at a position spaced above the drill bit 2020 by a spacer element 2024 in accordance with different drilling applications and requirements.

The upper and lower bodies are arranged coaxially and have aligned central bores 2011, 2012 which are sealed with respect to one another by an annular flexible seal 2003. As illustrated in Fig. 13 the upper body 2001 has at its lower end, a radial series of gear teeth 2013 which loosely end in corresponding recesses 2014 formed in an annular encircling wall portion 2015 of the lower body 2002. Each gear tooth

2013 has a barrel-shaped end face 2016, as seen in cross-section in Fig. 12A, which allows relative tilting of the upper and lower bodies 2001, 2002 whilst providing a torque driving connection therebetween.

The external wall of the upper body 2001, above the gear teeth 2013, is formed with an annular shoulder 2017. A thrust ring 2007 is located on the shoulder 2017. In some embodiments, the thrust ring 2017 may be a two-piece construction to facilitate insertion thereof. The cooperating surfaces of the thrust ring 2007 and the shoulder 2017 are arcuate to permit the aforesaid relative tilting of the upper and lower bodies.

A locking ring 2006 is threadably engaged within the upper end of the wall portion 2015 of the lower body 2002 to seat on the thrust ring 2007.

An upper elastomeric vibration ring 2005, having an L-shaped cross-section as seen in Fig. 12, is disposed between both annular circumferential and radial opposed surfaces of the upper body 2001 and the locking ring 2006. A lower elastomeric vibration ring 2004 is disposed in an annular recess 2018 within the lower body 2002 to engage the external wall of the lower end of the upper body 2001.

Fig. 14 shows, in schematic close up, a relation between bit body 112, cutter 114 and flexible matrix 113. Bit body 112 has a recess 1150 generally adapted to receive cutter 114 (also known as a stud), but be separated therefrom by elastomeric matrix 113. Cutter 114 has a PDC wafer 1151 mounted on a chamfered edge 1152 with cutter 114 having a flat end 1153 (a wear flat) and chamfered side 1154. In use wafer 1151 is forced against the rock formation 1155, causing cutter 114 to tilt in a clockwise direction thereby lifting the wear flat 1153 off formation 1155, increasing the relief angle, hence increasing the ability to penetrate the formation, an advantage in addition to the decrease of vibration level. The gap between cutter 114 and bit body 112 is preferably such that it allows a maximum tilt of up to 10 degrees. This gap depends in the depth of insertion of the cutter 114, the

cutter width and cutting force level exerted on the cutter. For example, the gap between cutter 114 and bit body 112 is at least 1 mm and usually 2 - 4 mm, when the depth of insertion in the recess 1150 is 10 - 30 mm and width of cutter 114 is 10 - 25 mm.

Fig. 15 shows an improvement in the arrangement of Fig. 14 with the recess 1250 containing a large circumferential slot 1256 and a plurality of smaller circumferential grooves 1257 in the curved recess wall 1268 and also in the flat end 1269 of the recess 1250. In the slot 1256 are two balls or cylinders 1259 separated by springs 1260. In grooves 1257 are elastomeric O-rings 1261. Cutter 124 is held in the recess 1250 by the spring/balls 1259/1260 but is able to tilt against the elastomeric rings 1261. The balls 1259 provide a pivot point. Lab tests have shown that such an arrangement will accept loads of up to 4000 Kg.

Fig. 16 shows a modification of the arrangement of Fig. 15 in which the cutter 134 is received in a preshaped socket 1362, which has the slots/grooves 1356 and 1357 etc. as 1256 and 1257 in Fig. 14 but the socket 1362 itself is received in a recess 1363 in the bit body 132. Socket 1362 may be of harder material than the bit body 132, e.g. when the socket is of sintered carbide and bit body is of steel or matrix material.

Fig. 17 shows a modification of Fig. 15, in which the recess 1450 is of outwardly reducing cross-section e.g. of generally frustoconical shape. A hollow frustoconical elastomeric stud catcher 1463 is in the recess 1450 and surrounds and grips the cutter 144, which is separated from the end face 1464 of the recess 1450 by a spring 143 or a resilient component e.g. an elastomeric spacer (143) which forces the cutter 144 against the grip of the catcher 1463. If desired a layer of adhesive (not shown) may be present between catcher 1463 and cutter 144 to increase the retention of cutter in the socket. Catcher 1463 may be retained in recess 1450 by means of an internally facing lip 1465 to recess 1450.

Fig. 18 shows the separate socket approach of Fig. 16 applied to the reduced cross-section recess approach of Fig. 17 and is self explanatory.

Figs. 19A/19B show a modification of the arrangement of Fig. 15, with cutter 164 retained in bit body 162 and spaced therefrom by elastomeric O-rings 1661. Fig. 19A shows the arrangement with a cutter 164 having an outer flat end 1653 and PDC wafer 1651. The flat end 1653 may have been machined or moulded, in a new cutter or may have been worn flat as in a used cutter. Fig. 19B shows the arrangement of Fig. 19A under load in use and shows the wafer 1651 contacting the formation, and the tilt allowing the relief angle to increase. This device is very suitable for entering harder formations.

In Figs. 14 - 19A/19B, the cutter is substantially perpendicular to the bit body, but can be inclined either towards or away from the direction of movement of the bit as shown in Figs. 20A - E which illustrate four variations on the Figs. 19A/19B arrangement. Extra support may be needed in a Fig. 20A approach to stop the cutter 174 being pulled out in use. An example of this support is shown in Fig. 20D, in which cutter 174 has a ledge 1766 separated from a corresponding lip 1765 on recess 1750 by elastomeric spacer 173. In Fig. 20E recess 1750 for cutter 174 may be in a protrusion 1767 of the bit body 172, as in a bladed bit. The arrangement in Fig. 20C can be valuable when drilling from a hard to a soft formation e.g. from sandstone to shale. Lowering the WOB will increase the relief rake and hence allow a cutter which has been flattened by the hard sandstone to be very active in the softer shale.

In the embodiments of Figs. 14 - 20, each cutter is mounted on the bit body so as to allow tilting of and/or relative lateral movement of the cutter with respect to the bit body. Such arrangements can be utilized in embodiments of the invention, e.g. as illustrated in Figs. 2 - 11, in which the bit body is also tiltable and/or laterally movable with respect to its shank, or in constructions in which the bit

body and the shank are rigidly connected together or formed integral with one another.

It will be appreciated that a plurality of the above described tiltable assemblies can be incorporated in a specific drill-string and drill bit application. For example a sub-assembly as illustrated in Fig. 12D can be incorporated in the drill string, e.g. between 1 and 3 ft. above the drill bit head in combination with at least one further tiltable assembly in accordance with the other described embodiments, disposed immediately above or incorporated in the drill bit.

The drill bits of the invention are less prone to vibration and can give improved benefits as described above; these benefits can be shown in use. For many purposes however it is desirable to be able to test bits in the laboratory and hitherto such testing was done there with apparatus comprising a rigid bit, short drill string or collar and motor. But we have found that drilling characteristics observed with such laboratory apparatus did not often parallel those found down hole, so that the bits broke more often down hole than was predicted from the tests. We have invented a laboratory drilling apparatus which can more closely create types of observed down hole phenomena.

The present invention provides a laboratory apparatus for simulating drilling which comprises (a) at least one rigid rotatable body connected directly or indirectly to each of (b) a drill bit for contacting a simulated bottom hole surface, and (c) means for rotating said body and bit, wherein at least one of (a) and (b), and (a) and (c), and (a) and another (a) when present, is separated by a flexible connector.

This apparatus can be capable of creating a large range of dynamic phenomena found in the field. Each rigid rotatable body used need only weigh up to 10 - 20 kg for ease of handling.

In the apparatus the rigid rotatable body simulates part or all of the drill string. The body is usually a cylinder, and made of steel, or other materials e.g. other metals such

as aluminium or thermoset synthetic material or tungsten carbide, if it is desired to alter the inertia of the body. The bodies have connecting means e.g. threads at each end and usually an inner passage through them for fluid or gas.

The apparatus also comprises at least one flexible connector joining the rotating means to the rigid rotatable body and/or that body to the bit and/or one rigid rotatable body to another rigid rotatable body. Preferably there is a separate flexible connector between the rotating means and the body, and each body to the next body and the last body to the bit. To the last body, a bit can be rigidly or flexibly connected, depending upon which situation is investigated. When a reference situation has been created, either with a rigid or flexible bit, bit designs and particularly the properties of the scaled flexible connector can be studied. The properties of the bit so obtained in the laboratory can be related to the actual bit.

Each flexible connector can be adhered to the body, rotating means or bit, but preferably is connected to it by a screw thread. Each connector therefore preferably has an outwardly extending thread on each face of a pair of opposing radial faces adapted to engage threads on the body, rotating means or bit; conveniently a pair of plates each having thread extending axially therefrom is spaced apart by an elastomeric material in the form of a layered body. The layered body may if desired be adhered together or alternatively may be kept together with a pin or bolt between the plates which still enables the layered body to flex in a transverse direction. It is also possible to have one or more internal plates separating elastomeric bodies in a multi-layer structure, the elastomeric bodies being, if desired, of different compression modulus. The elastomeric material may be as described above.

The other essential ingredients in the apparatus are the rotating means e.g. an electric motor, especially of variable speed, and also the bit, whose design is being tested.

In use the bit bears upon a test piece of material to be drilled. In order to vary the angle of contact of bit on the

piece and to simulate borehole constraint, the rigid rotatable bodies preferably pass through a simulated borehole wall. This wall may comprise rings, especially a series of rings defining a path in which the rigid bodies rotate, to create a simulated well bore profile. These rings may vary in inner diameter, outer diameter, height, mass, rigidity, inner surface friction coefficient, and may be made of different materials e.g. steel, concrete, synthetic polymer, whether thermoplastic thermoset or elastomeric, or rock. Alternatively to the rings there may be used a number of facially touching tiles made e.g. from rock, concrete, synthetic polymer, compositions comprising concrete, polymer, metal, sand or sand with polymer; a hole can be drilled through the tiles to provide the simulated borehole.

The test piece upon which the bit acts, is the simulated bottom hole material which may comprise natural rock, concrete, or compositions comprising these or sand or metal powder. Simulated rock of variable physical characteristics may be made from mixtures of clay and granular material e.g. sand, silicate or carbonate in different proportions and with different degrees of compaction.

The whole test apparatus may be 1 - 15m high, conveniently 1 - 4m high, with the rigid cylinders of 50 - 500 mm long and 2 - 200 mm wide such as ones 300 mm long with diameters of e.g. 5, 10 or 100 mm. Flexible connectors may be 10 - 60 mm long and of 5 - 100 e.g. 10 - 90 mm diameter. The apparatus preferably has at least one of its natural frequencies (axial and torsional) not greater than 10 to 5 Hz, e.g. 0.05 - 10 Hz, such as not greater than 1 Hz. The apparatus may be wall mounted or mounted in a frame, which may be portable. The rigid bodies (a) drill bit (b) and rotation means (c) with the flexible connector(s) of the invention can have an equivalent ratio of stiffness to mass of at most 1000 sec^{-2} e.g. $100 - 0.01 \text{ sec}^{-2}$ especially $60 - 0.1 \text{ sec}^{-2}$.

If desired the apparatus may also include means for passing fluid e.g. water or gel around the bottom hole

assembly or down the central drilling passage of the cylinders and flexible connectors.

The laboratory apparatus of the invention may be able to create at the bit conditions more realistic to those experienced by bits down hole than we have found possible with previous laboratory drilling apparatus with very rigid shafts and no flexible connectors. Thus it has often been found, that, with bits tested in such apparatus, the bits break more easily down hole (i.e. had a shorter life) than predicted from the laboratory apparatus results. Thus the apparatus of the present invention can be used to provide an improved method of testing a drill bit. Furthermore the rings or plates of other materials defining simulated bore hole walls can be moved relative to one another to create different degrees of bore hole interaction to study the effect of the changes on the dynamic behaviour of the bit.

This aspect of the invention is illustrated in Figs. 21 and 22, in which Fig. 21 represents a schematic drawing of a complete testing apparatus and Fig. 22 represents a schematic section through a bit for use in that apparatus during construction.

Referring to Fig. 21, the apparatus has a motor 191, e.g. AC non-synchronous electric motor or a controlled DC electric motor, which drives a series of rigid cylinders 192 and 193 which are themselves joined together by flexible connectors 194. Attached to the lowest cylinder 193 is a further flexible connector 194, in turn attached to a bit 195, each of the connector 194 and bit 195 can independently be rigid or flexible. The rigid cylinders 192, connectors 194 and bit 195 have a continuous bore through them (not shown) to allow passage of a drilling fluid. The rigid cylinders 192 and 193 are constrained to rotate through bores 198 in plates 199, which may be single ones e.g. a metal ring or a series of plates 1910 which may be tiles or other sheets simply lain on top of one another or laminated together. Bores 198 simulate the bore hole passing through rocks and provide confinement to the string. Bores 198 may be an angle to vertical to simulate

non-vertical drilling and the angle may be different in the location of different rotatable bodies to simulate a curved bore hole profile. At the top of the assembly of rigid cylinders 192 and 193 and connectors 194, two cylinders 192 and a connector 194 are located inside a pipe 1911 even more closely to simulate the casing and frictional effects therein. The bit 195 is in contact with a test piece 1912 being drilled. Test piece 1912 and the plates 199 are mounted in a frame 1913; the motor 191 may also be mounted on the frame 1913, or other beam support or separately supported e.g. on a wall, in both cases being mounted either rigidly or with freedom of axial movement. The whole assembly may be 1.5, 3, 5 or 10m high. The cylinders may be 1 - 10 kg, may be of ferrous metal e.g. steel and can be conveniently of 300 mm length and 5, 10 or 100 mm width. The flexible connectors 194 usually have two metal plates separated by an elastomeric body and each plate usually has connection means e.g. an outwardly directed thread for joining to cylinders 192 and 193 or bit 195; the connector has a bore through it for the fluid. If desired the elastomeric body may be replaced by a spring.

If desired the cylinders 192 and/or 193 may contain sensors or other measurement equipment. The combination of inertia of the cylinders and flexibility of the connectors can be adjusted to provide a simulated drill string of vibration frequency of e.g. 0.2 Hz, usually similar to that of a drill string which may have variable length but is usually several kilometers long.

Fig. 22 shows a cylinder 201 of inner diameter corresponding to the bit diameter for the apparatus. Inside cylinder 201 are a series of blades 202, made e.g. of metal or from hard synthetic plastic e.g. thermoset resin, and especially with an elongate section 203 and a sharply curved section 204 (like a field hockey stick). The blades 202 are lightly glued in place to provide a bit with a known profile. The cylinder 201 is partly filled with moulding clay 205 or other inert malleable material so the blades 202 project partly above the clay. A shank 206 carrying a connecting

thread 207 is located on the longitudinal axis of the cylinder. Between the clay 205 and shank 206 is set resin 208. The whole assembly apart from the cylinder and the moulding clay constitutes a small scale bit, which bit can be assembled in the above order with settable resin added last; once the resin has set the bit can be removed from the cylinder 201 and cleaned to remove the clay, thereby revealing the blades 202 embedded in cured resin 208 in a bit. If desired the shank 206 or cured resin 208 may be drilled to provide fluid channels for cleaning the bit.

When using the test apparatus of Figs. 21 and 22, various parameters and dimensions of the apparatus can be specifically selected to reproduce actual conditions of a particular field site to be investigated. The test using the apparatus can then accurately simulate drilling conditions at that test site so that characteristics of the drilling apparatus, e.g. an apparatus in accordance with the invention, and/or other downhole devices can be optimized, e.g. the design and profile of the drilling bit. Once this is achieved, it is then only necessary to scale up the selected equipment design thereby achieving a faster field optimization of such design. The apparatus can also be used to specify the running procedure of that downhole equipment.

CLAIMS

1. Apparatus for a drill bit which is suitable for use in drilling, coring or removing material from a geological subsurface formation, which apparatus comprises a first member (21) for attachment directly or indirectly to a drill string and a second member (22) carrying or constituting at least one means for drilling, said first member (21) being in torque and weight transmitting relation with said second member (22), characterized by means (25) allowing tilting of or lateral movement of said first member (21) relative to said second member (22).
2. Apparatus according to Claim 1, in the form of a sub-assembly (2001,2002) for incorporation within a drill bit.
3. Apparatus according to Claim 2, wherein a drill bit body (2020) is integral with the second member (2002) with said first member (2001) constituting a drive shank of the drill bit.
4. Apparatus according to Claim 1, wherein said first member (21) constitutes the shank of a drill bit, and said second member (22) constitutes a drill bit body which carries at least one means (23) for drilling.
5. Apparatus according to Claim 1, wherein said means (25) allows free relative tilting or lateral movement of said first and second members in any direction.
6. Apparatus according to any one of Claims 1 - 5 wherein said means (25) for allowing relative tilting or lateral movement of said first and second members comprise elastically or resiliently deformable means.
7. Apparatus according to any one of Claims 1 - 6, including means (46) for holding said first and second members

(41,42) together and for transferring torque and weight from said first to said second member.

8. Apparatus according to Claim 1 or Claim 6, wherein said second member (32) is tiltable with respect to said first member (31) against compressible means (35) between said first and second members.

9. Apparatus according to Claim 1 wherein said first and second members (41,42) have a cooperating passage (412) therein.

10. Apparatus according to Claim 9 which comprises compressible sealing means (45) between said first and second members to prevent escape of fluid from said passage (412) between said members.

11. Apparatus according to Claim 7 wherein said holding means and torque transfer means together comprise at least one elongate member (36) passing through said second member (32) and engaging in at least one recess or slot (37) in said first member (31).

12. Apparatus according to Claim 7 wherein said torque transfer means comprises grooves or recesses (617) in one of said first and second member (61,62) engaging corresponding gear components (618) in the other of said first and second members.

13. Apparatus according to Claim 12 wherein said holding means comprises a threaded locking ring (619) surrounding said first member (61) and engaging threads (620) on said second member (62).

14. Apparatus according to Claim 9 which comprises a first member having a first elongate conduit (812) therethrough cooperating with conduit means in said second

member (82), said first conduit and said second conduit means being in fluid contact by way of a flexible pipe (825).

15. Apparatus according to Claim 9, wherein fluid passage means (3004,3005) is provided through said first member (3001), and wherein conduit extension means (3006) are provided at outlet ends of said fluid passage means (3005) on said first member to extend through said second member so as to discharge fluid below the second member without exerting a downward fluid force thereon.

16. Apparatus according to Claim 1 or Claim 5 or Claim 6 wherein said first member constitutes a drill bit body (112) and said second member constitutes at least one means (114) for cutting, which is carried by the drill bit body (112).

17. Apparatus according to Claim 16 wherein said cutting means comprises at least one cutter (114) which is tiltable with respect to said drill bit body (112).

18. Apparatus according to Claim 17 wherein said cutter (114) is adhered to said drill bit body (112) by an elastomeric spacer (113).

19. Apparatus according to Claim 17 wherein said cutter (124) comprises a stud, which is in a socket (1250) in said drill bit body with means (1259,1260) to restrain removal of said stud from said socket, and at least one spacer (1261) allowing tilting of said cutter with respect to said drill bit body.

20. Apparatus according to Claim 19 wherein said socket (1362) is in a separate member from said drill bit body (132), said member itself being in a hole (1363) in said drill bit body (132).

21. Apparatus according to Claim 19 wherein said restraining means comprises an elastomeric stud catcher (1463) in a socket (1450) which is of outwardly decreasing diameter.

22. Apparatus according to Claim 8 or Claim 10 wherein said compressible means comprises an elastomeric spacer (35,45) between at least part of said first and second members (31,32; 41,42).

23. Apparatus according to Claim 22 wherein said elastomer is at least one of a hydrogenated nitrile rubber, a nitrile rubber and a polyurethane, and has a Shore A hardness of at least 80.

24. Apparatus according to Claim 22 wherein said spacer comprises an elastomer derived from a settable liquid set in situ.

25. Apparatus according to Claim 22 wherein said spacer is a preformed ring or gasket.

26. Apparatus according to Claim 22 wherein said spacer is a layered body with at least one layer of elastomer and at least one layer of metal.

27. Apparatus according to Claim 18 or Claim 22 wherein said spacer is at least 0.3 mm thick.

28. Apparatus according to Claim 8 or Claim 10 wherein said compressible means comprises a hollow body (932) adapted to contain a compressible fluid.

29. Apparatus according to Claim 28 wherein said compressible means (932) is adapted to provide torque transfer means between said first and second members (91,92).

30. Apparatus according to any one of Claims 1 - 6 or Claim 15 wherein said second member is tiltable relative to said first member against a hollow cylinder or spring.

31. Apparatus according to Claim 1 wherein said means (25) is adapted to allow tilting of up to 15 degrees.

32. A drill bit including apparatus according to any one of Claims 1 - 7 or Claim 16.

33. A drill bit including at least one apparatus according to any one of Claims 2 - 4 together with an apparatus according to Claim 16.

34. A sub-assembly for incorporation in a drill string, said sub-assembly comprising a first member (2001) and a second member (2002) each for torque transmitting attachment to respective elements of the drill string to provide a rotary drive connection between those elements of the drill string, means (2007,2013,2014,2017) for transmitting weight and torque between the first and second members (2001,2002), and means (2004,2005,2016) for allowing tilting or lateral movement of said first member (2001) relative to said second member (2002) freely in any direction.

35. A sub-assembly according to Claim 34 wherein said weight and torque transmitting means including a series of radial teeth (2013) on said first member (2001) which loosely engage in corresponding recesses (2014) in said second member (2002), with the radially outer surfaces (2016) of the teeth (2013) and the opposed base surfaces of the recesses (2014) being shaped to allow said relative tilting or lateral movement of said first and second members (2001,2002).

36. A sub-assembly according to Claim 35 wherein said means for allowing relative tilting or lateral movement of

said first and second members (2001,2002) include elastically or resiliently deformable means (2004,2005).

37. A sub-assembly according to Claim 34 wherein said second member (2021) is formed with connector means (2021) for attachment thereto of a shank (2023) of a drill bit (2022).

38. A drill string including at least one sub-assembly according to any one of Claims 34 - 37.

39. The combination of a drill string according to Claim 38 and a drill bit, wherein at least one sub-assembly is disposed at a position spaced at a distance above the drill bit (2020).

40. The combination of a drill string according to Claim 38 and a drill bit according to Claim 32 or Claim 33.

41. A method of drilling, coring or removing material from a geological subsurface formation using a drill bit according to Claim 32 or Claim 33, or a drill string according to Claim 38 or a combination of a drill string and a drill bit according to Claim 39 or Claim 40.

42. An apparatus for simulating drilling which comprises (a) at least one rigid rotatable body (192) connected directly or indirectly to (b) a drill bit (195) for contacting a simulated bottom hole surface, and (c) means (191) for rotating said body and bit, wherein at least one of (a) and (b), and (a) and (c), is separated by a flexible connector (194).

43. An apparatus according to Claim 42 which comprises at least two rigid bodies (a) (192,193) spaced from one another and from (b) and (c) by flexible connectors (194).

44. An apparatus according to Claim 42 wherein said body (a) (192) is a rigid cylinder threaded to a correspondingly threaded flexible connector (194).

45. An apparatus according to Claim 42 wherein said flexible connector comprises two plates each carrying a thread adapted to engage a rigid cylinder, said plates being separated by a flexible member.



46. An apparatus according to Claim 42 which also comprises a simulated bore hole comprising at least one bore member having a bore in which said rigid body (192) can rotate.

47. An apparatus according to Claim 42 which has one of its natural frequencies not greater than 10 Hz, preferably not greater than 1 Hz.

48. An apparatus according to Claim 42 which comprises an axial passage through all of said rotatable bodies (192,193), flexible connectors (194) and the drill bit (195).

49. A method of simulating downhole drilling conditions of a specific downhole location utilizing an apparatus according to Claim 36, including testing scale versions of downhole equipment to be used at said downhole location in said apparatus and altering the design of the equipment as necessary, in order to reach an optimized design of such equipment, and using the optimized design for the corresponding equipment to be used in practice at said downhole location.

1/20

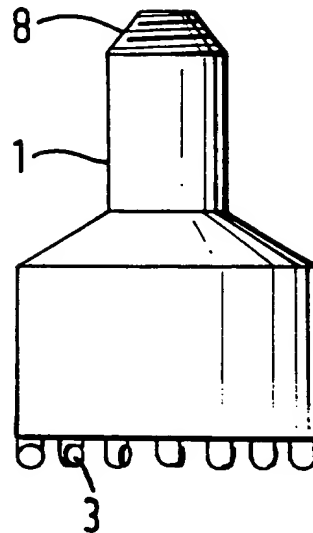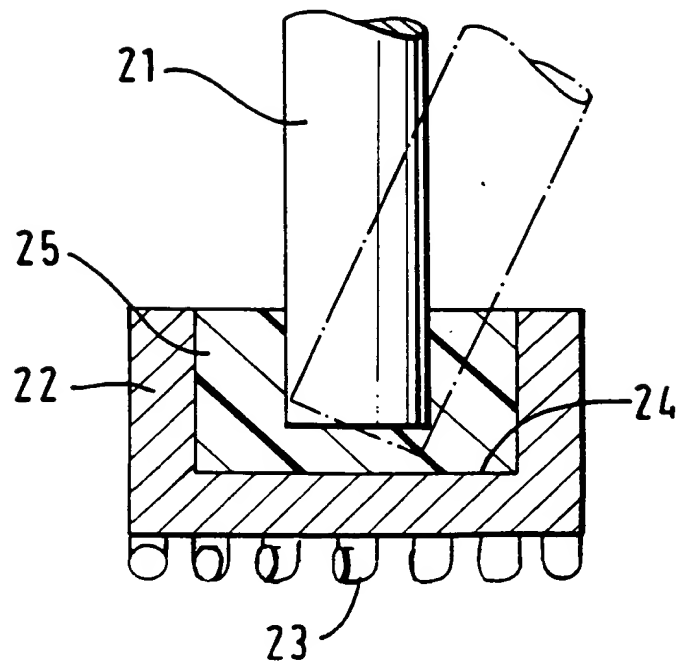FIG. 1 PRIOR ART*FIG. 2*

2/20

FIG. 3A



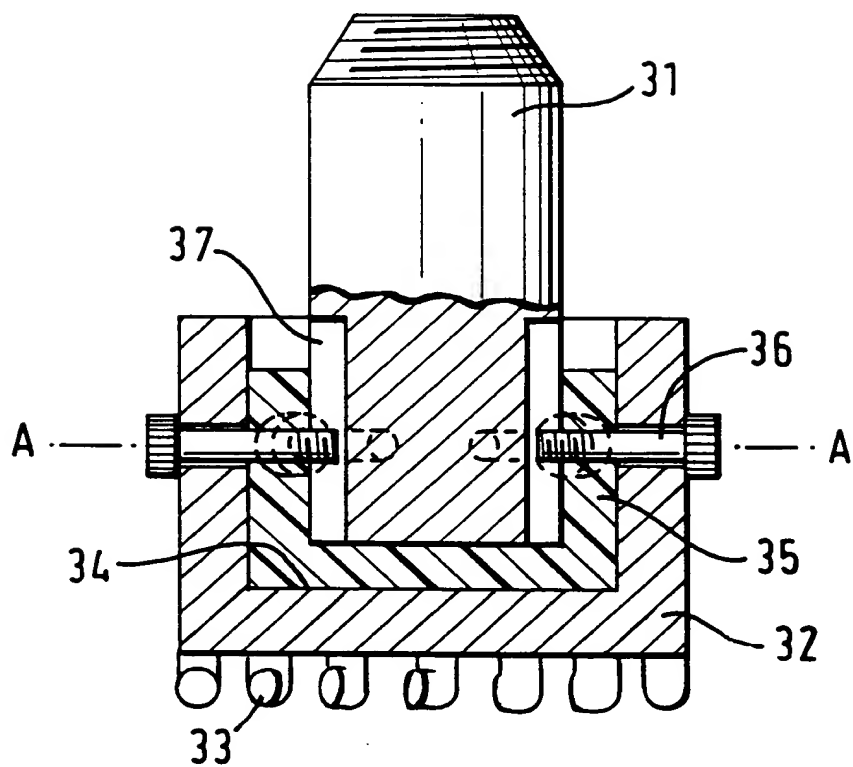


FIG. 3B

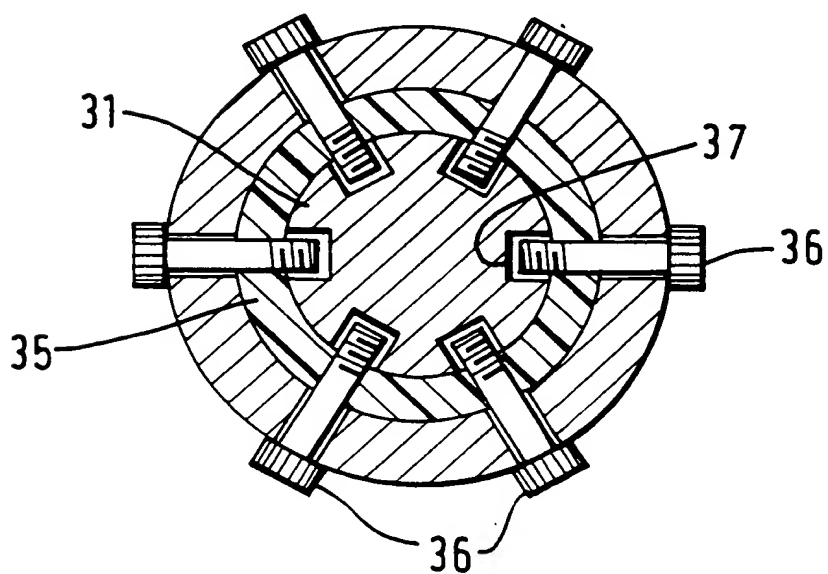


3/20

FIG. 4

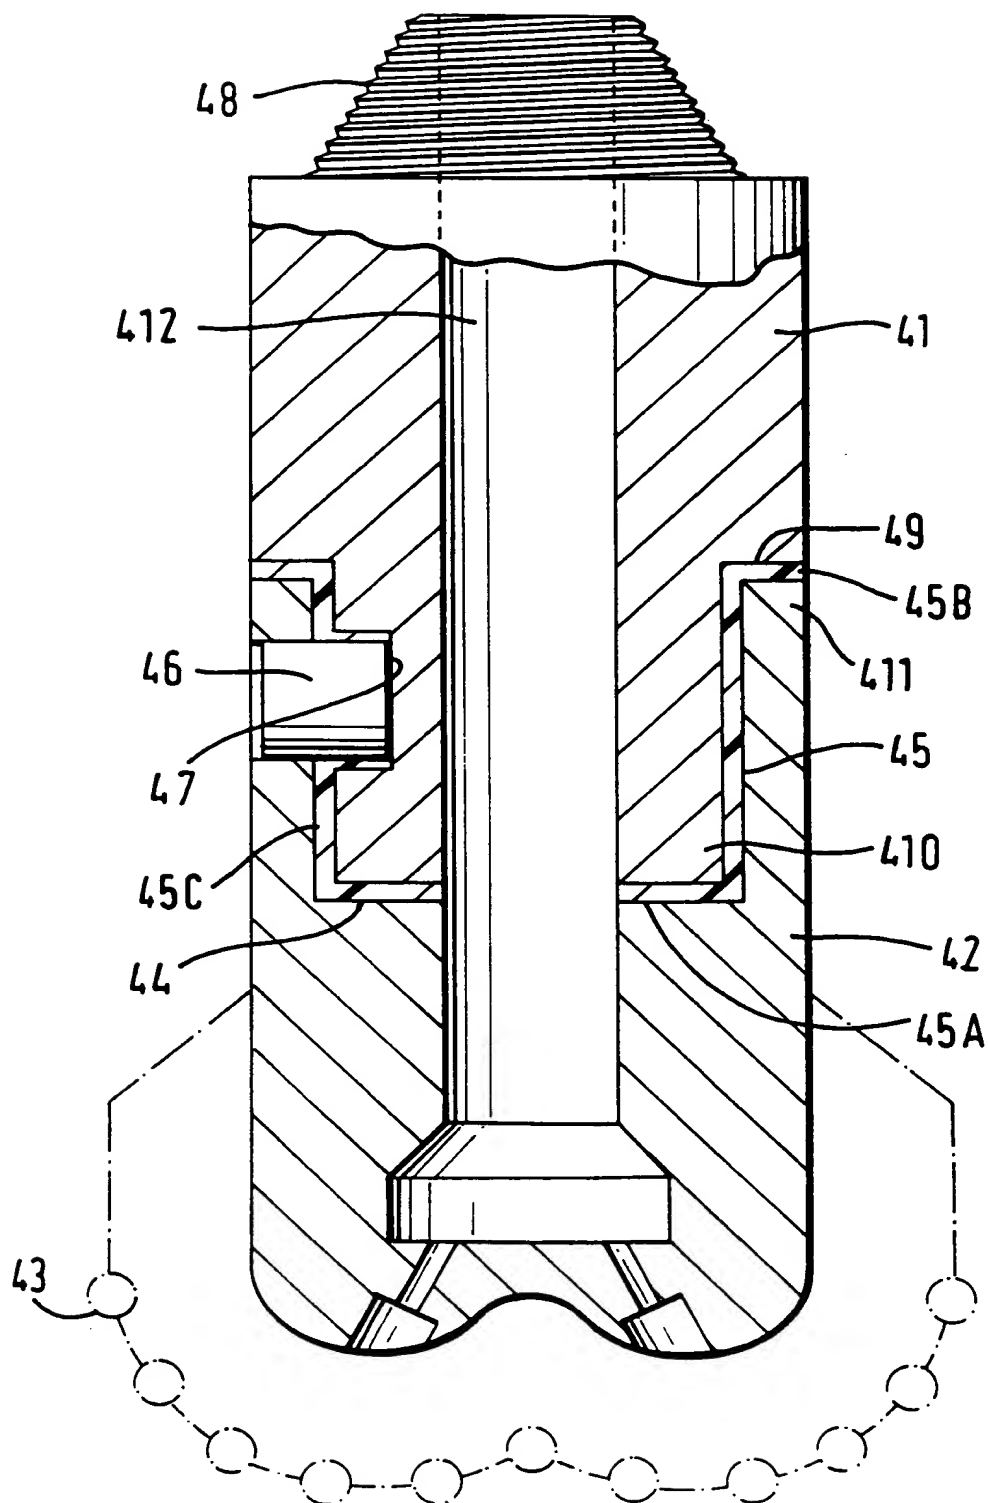

4/20
FIG. 5

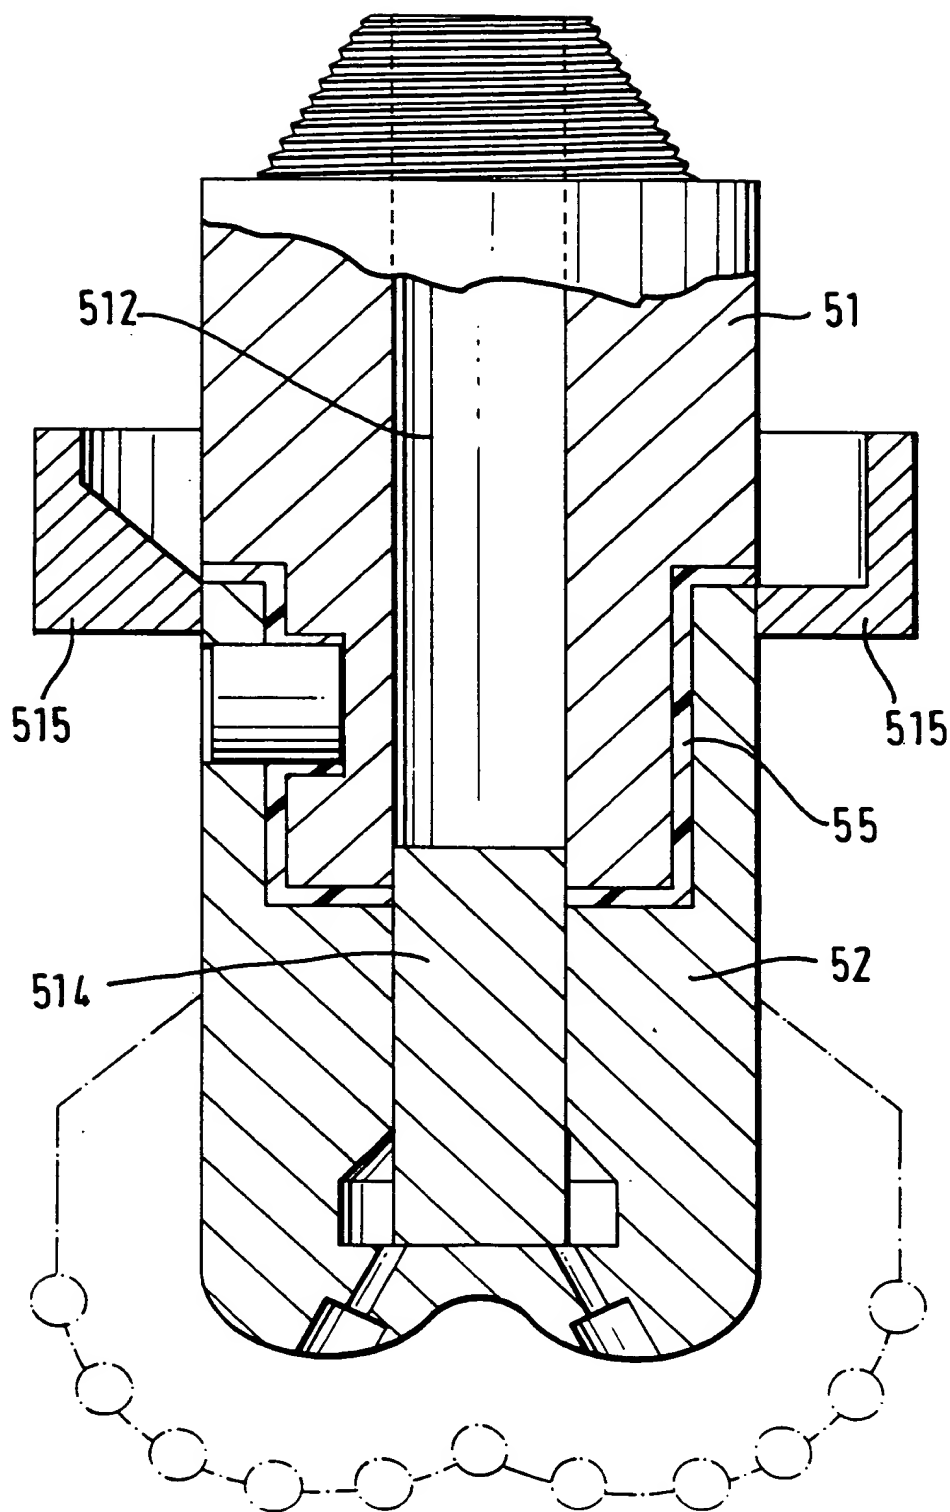

5/20

FIG. 6A





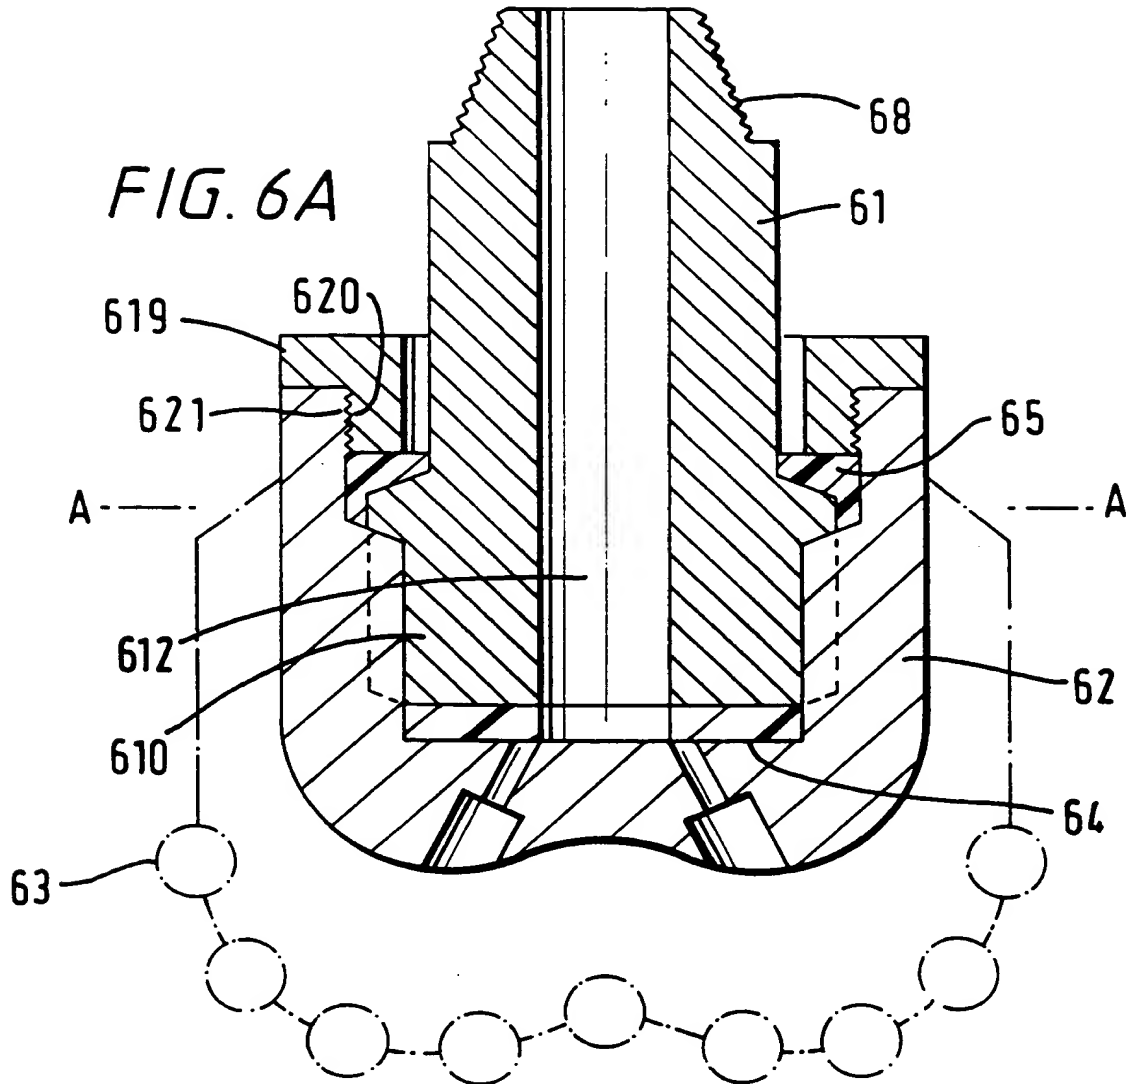


FIG. 6B

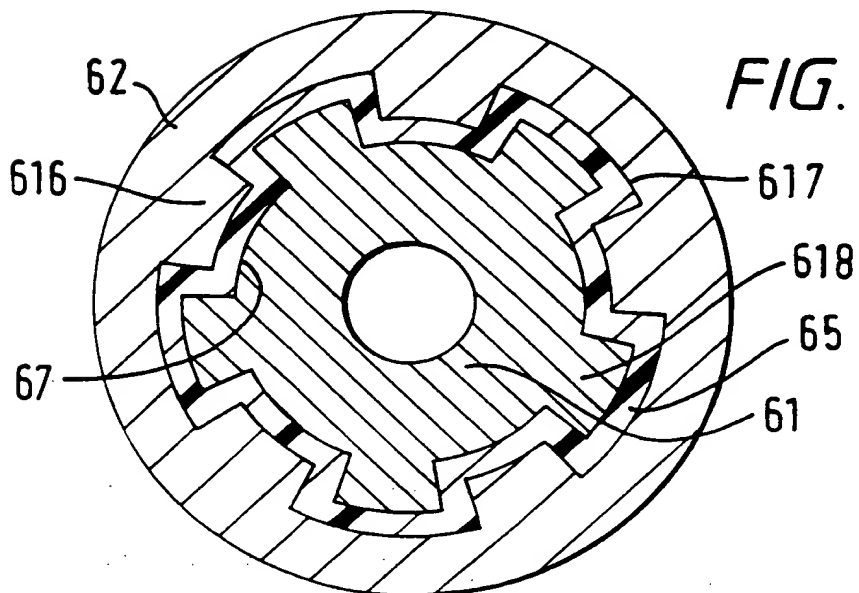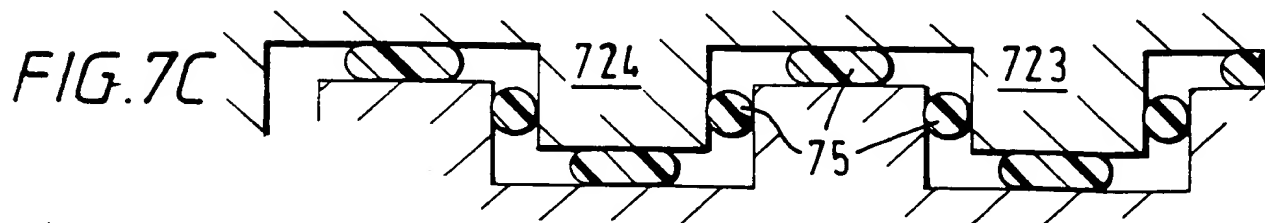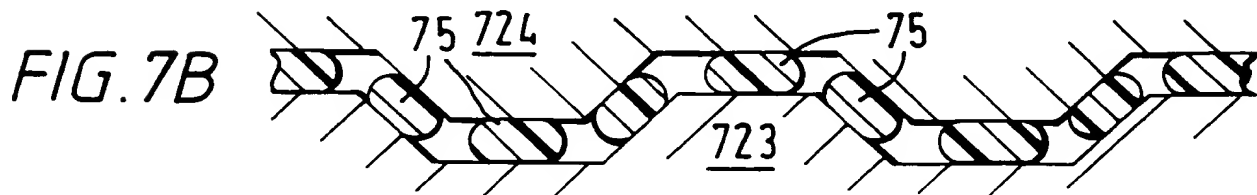


6/20

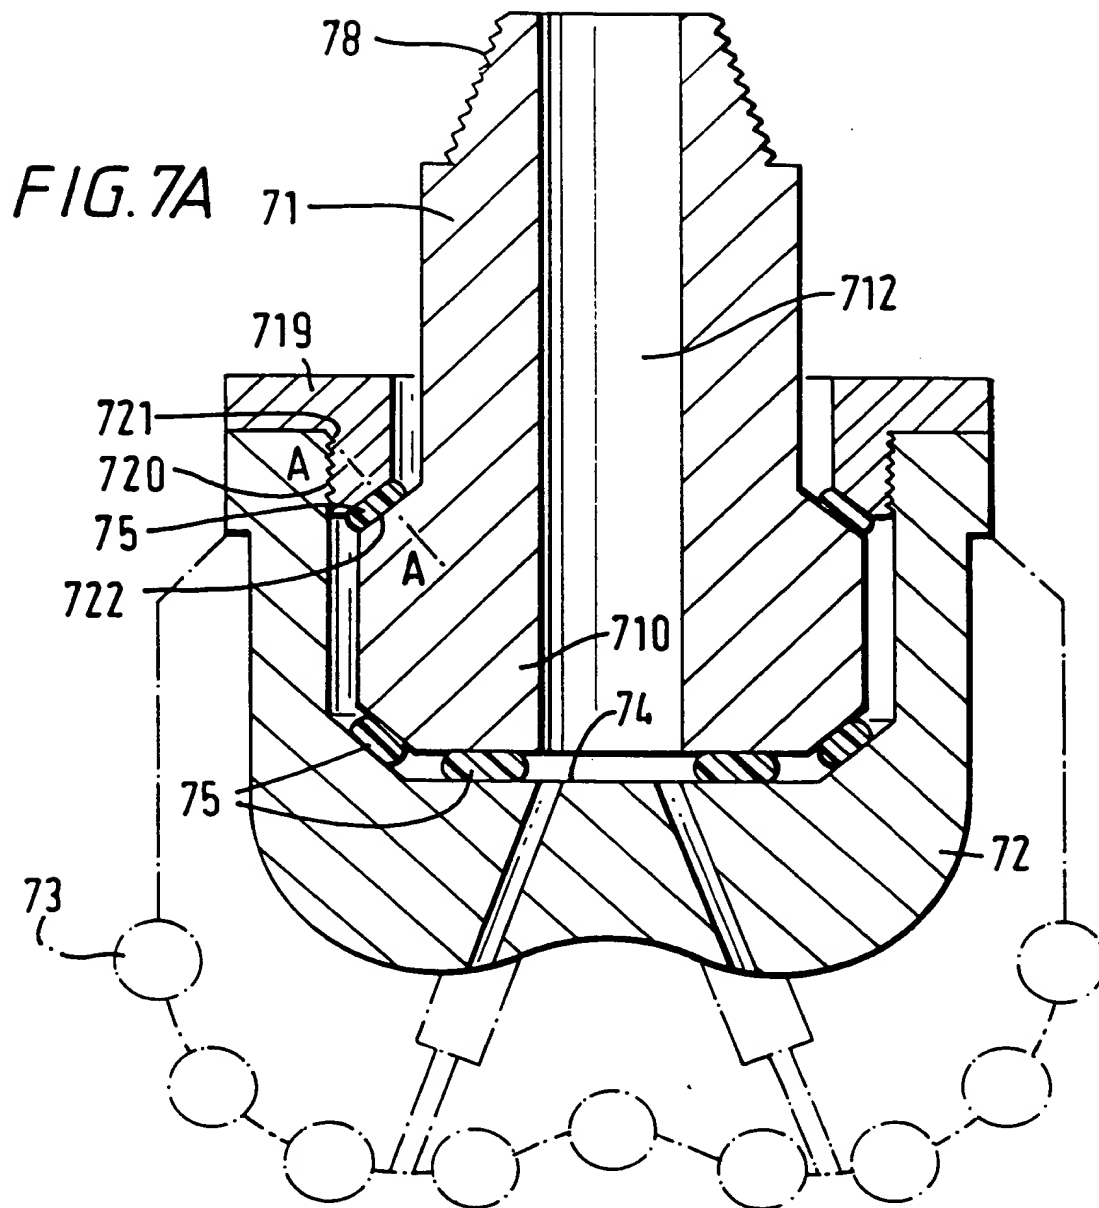


7/20

FIG. 8

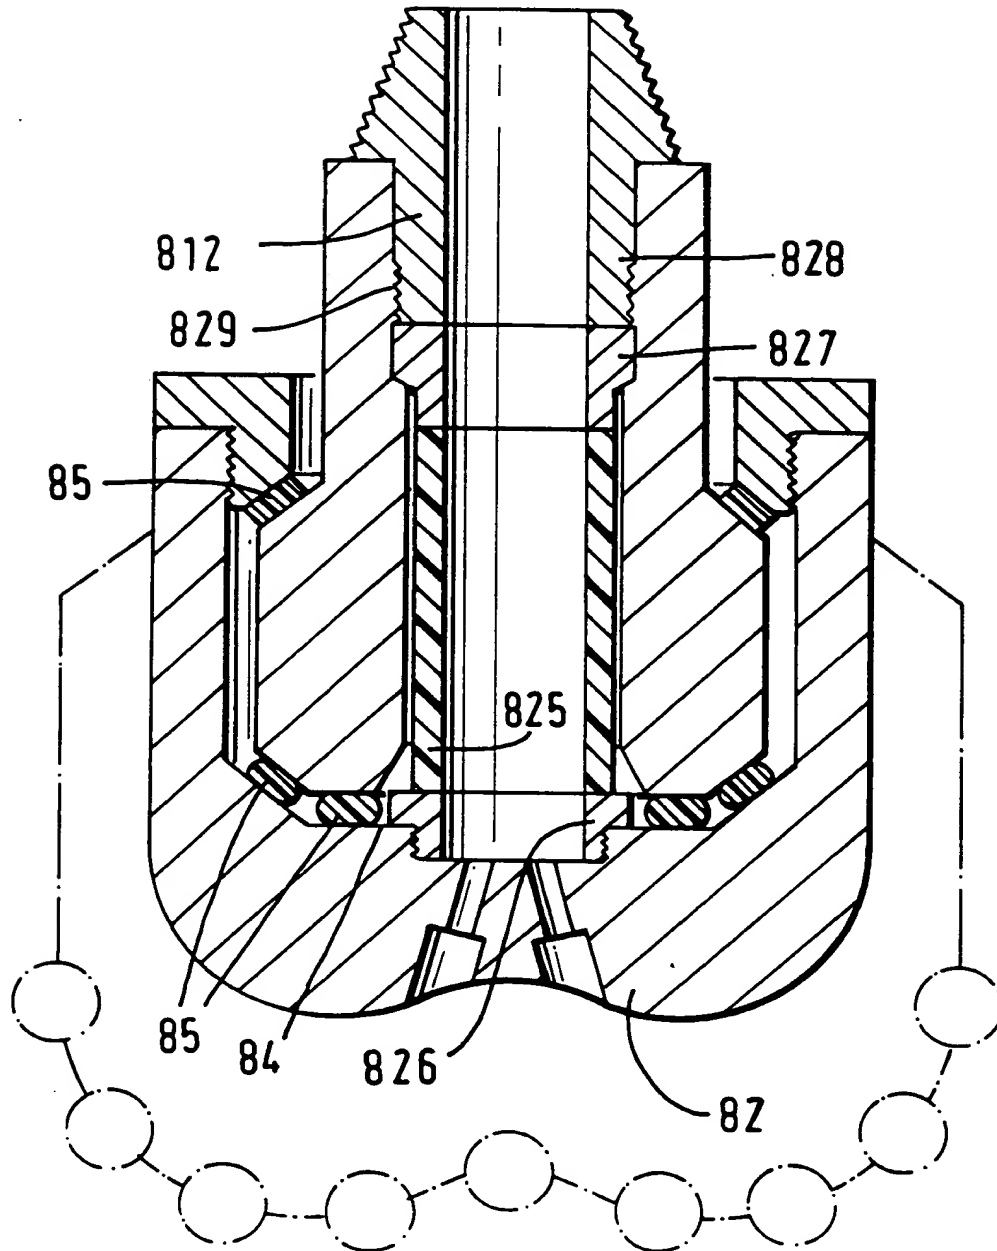


8/20

FIG. 9

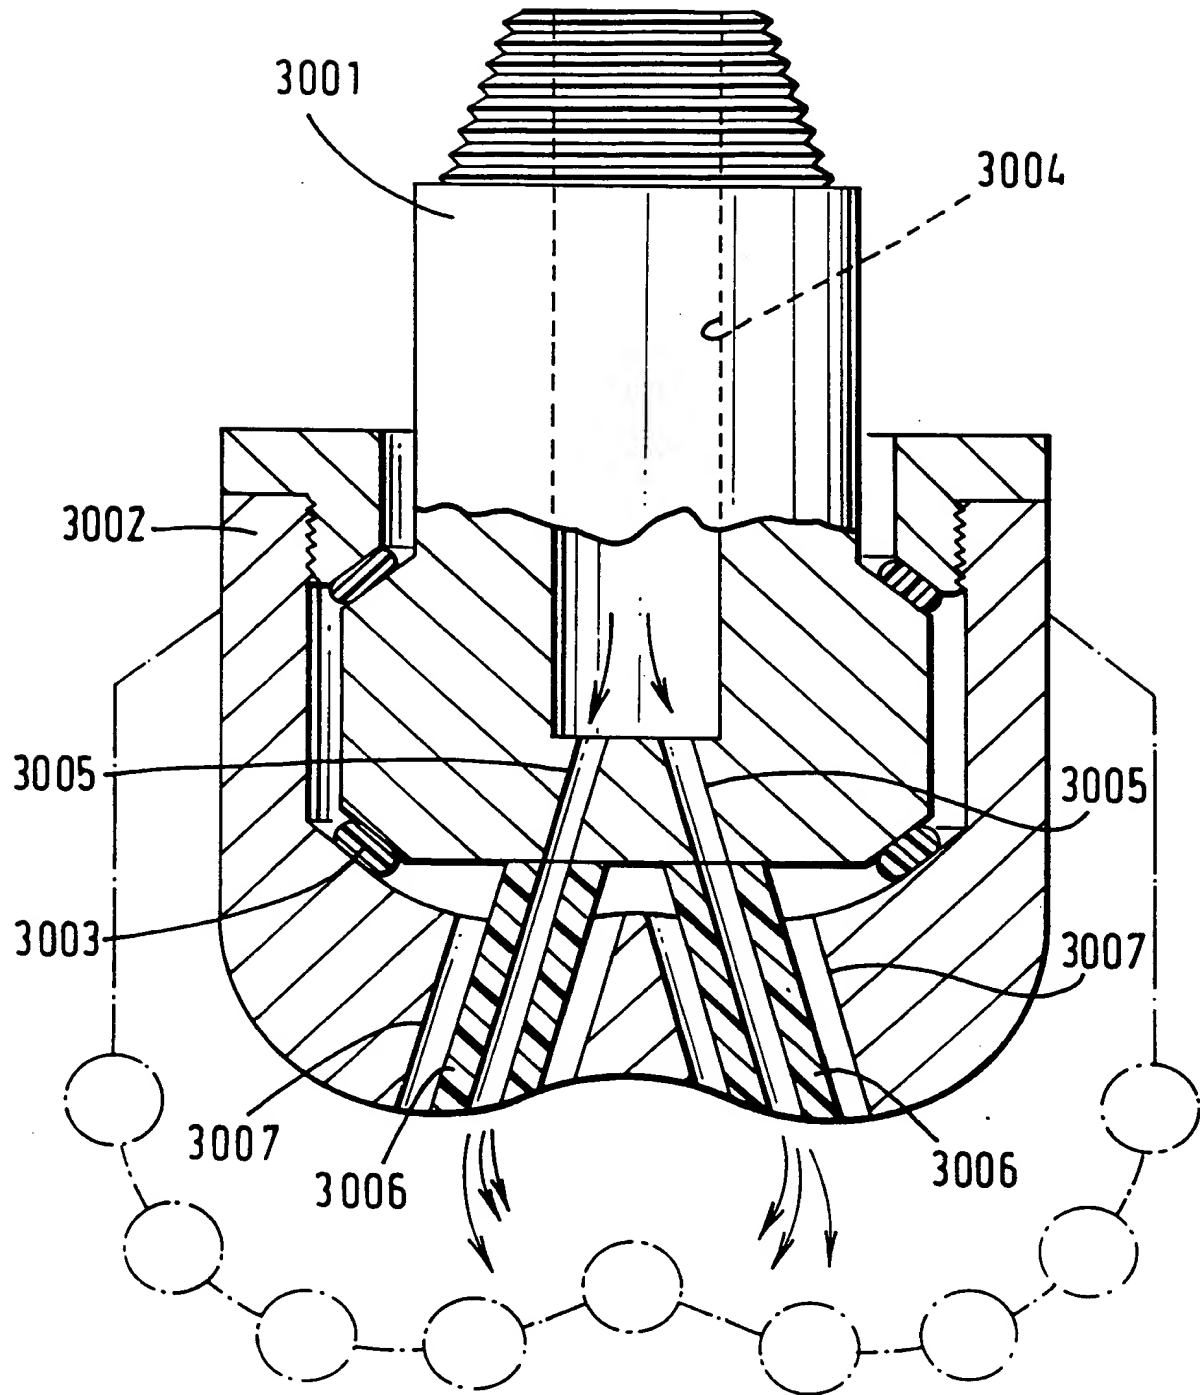


9/20

FIG. 10

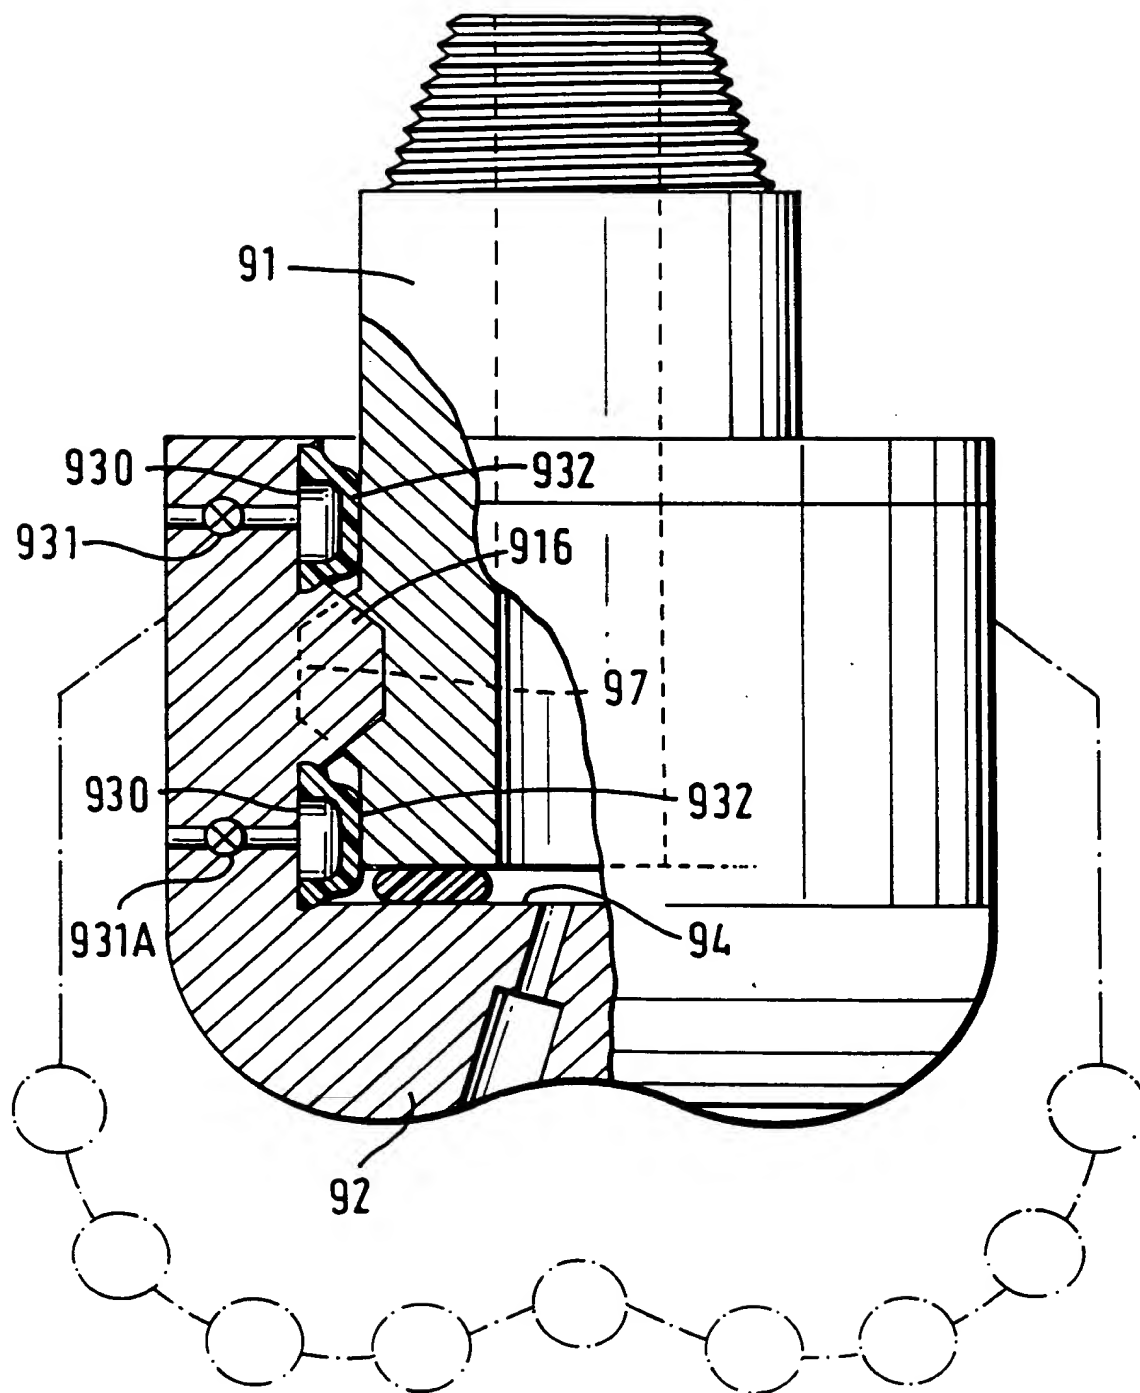

10/20

FIG. 11

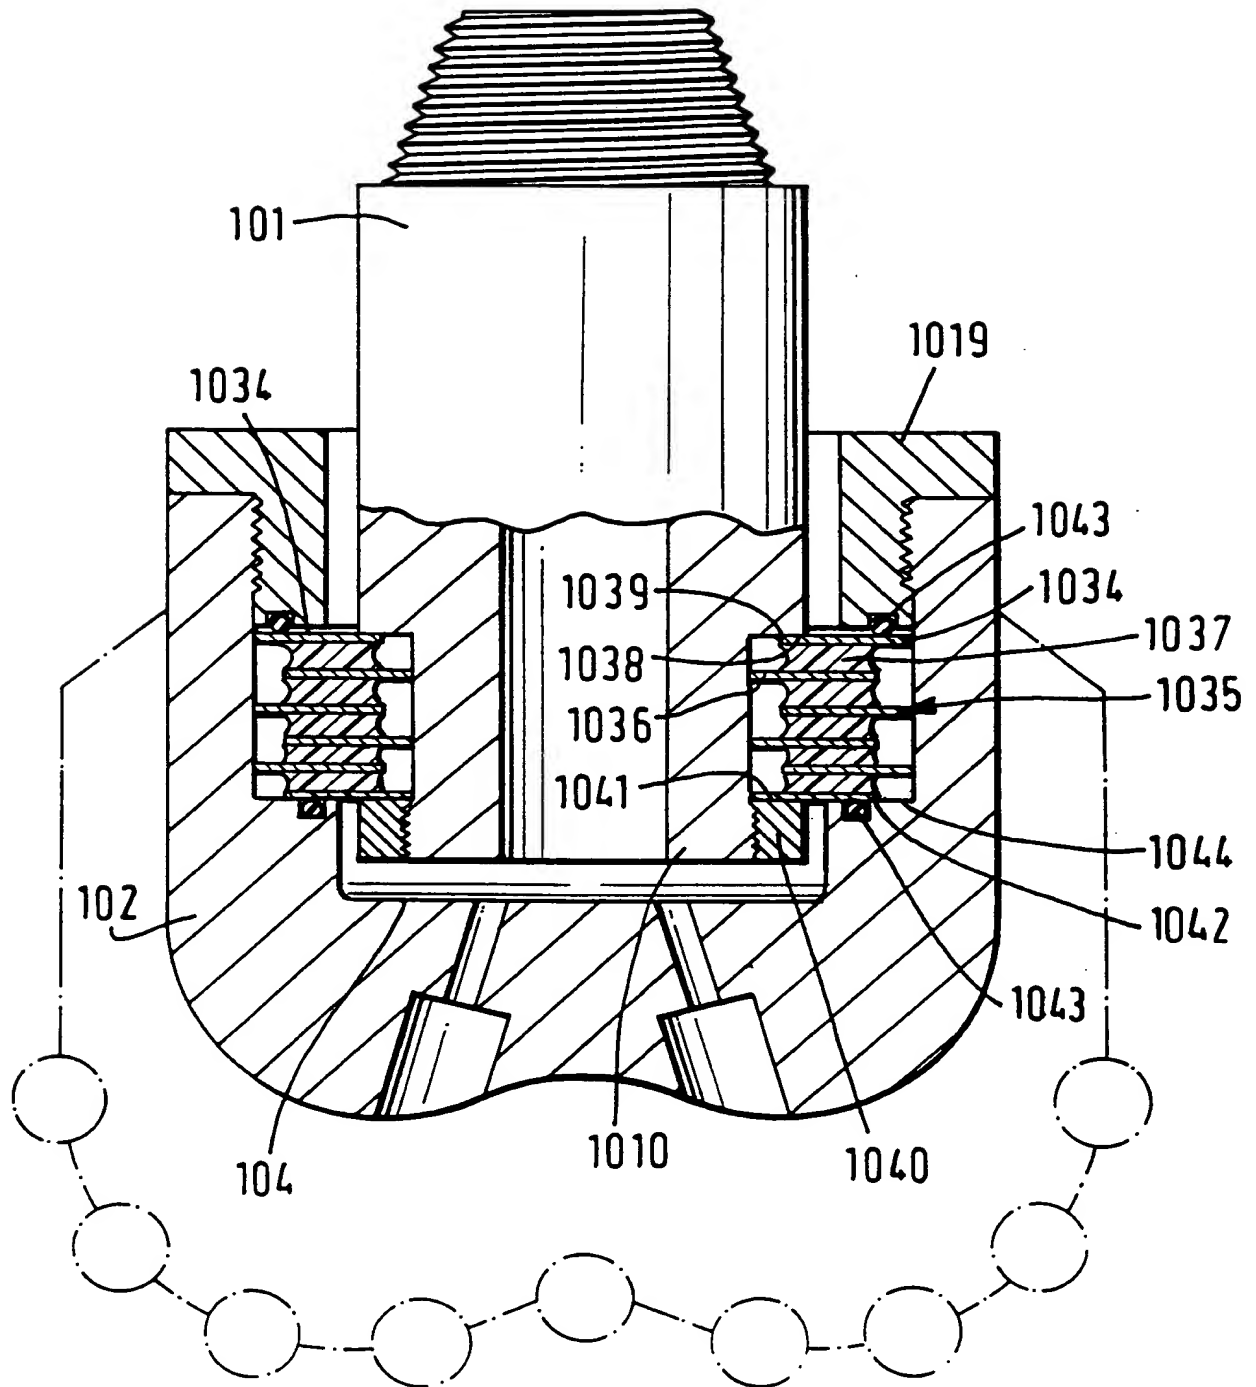

11/20

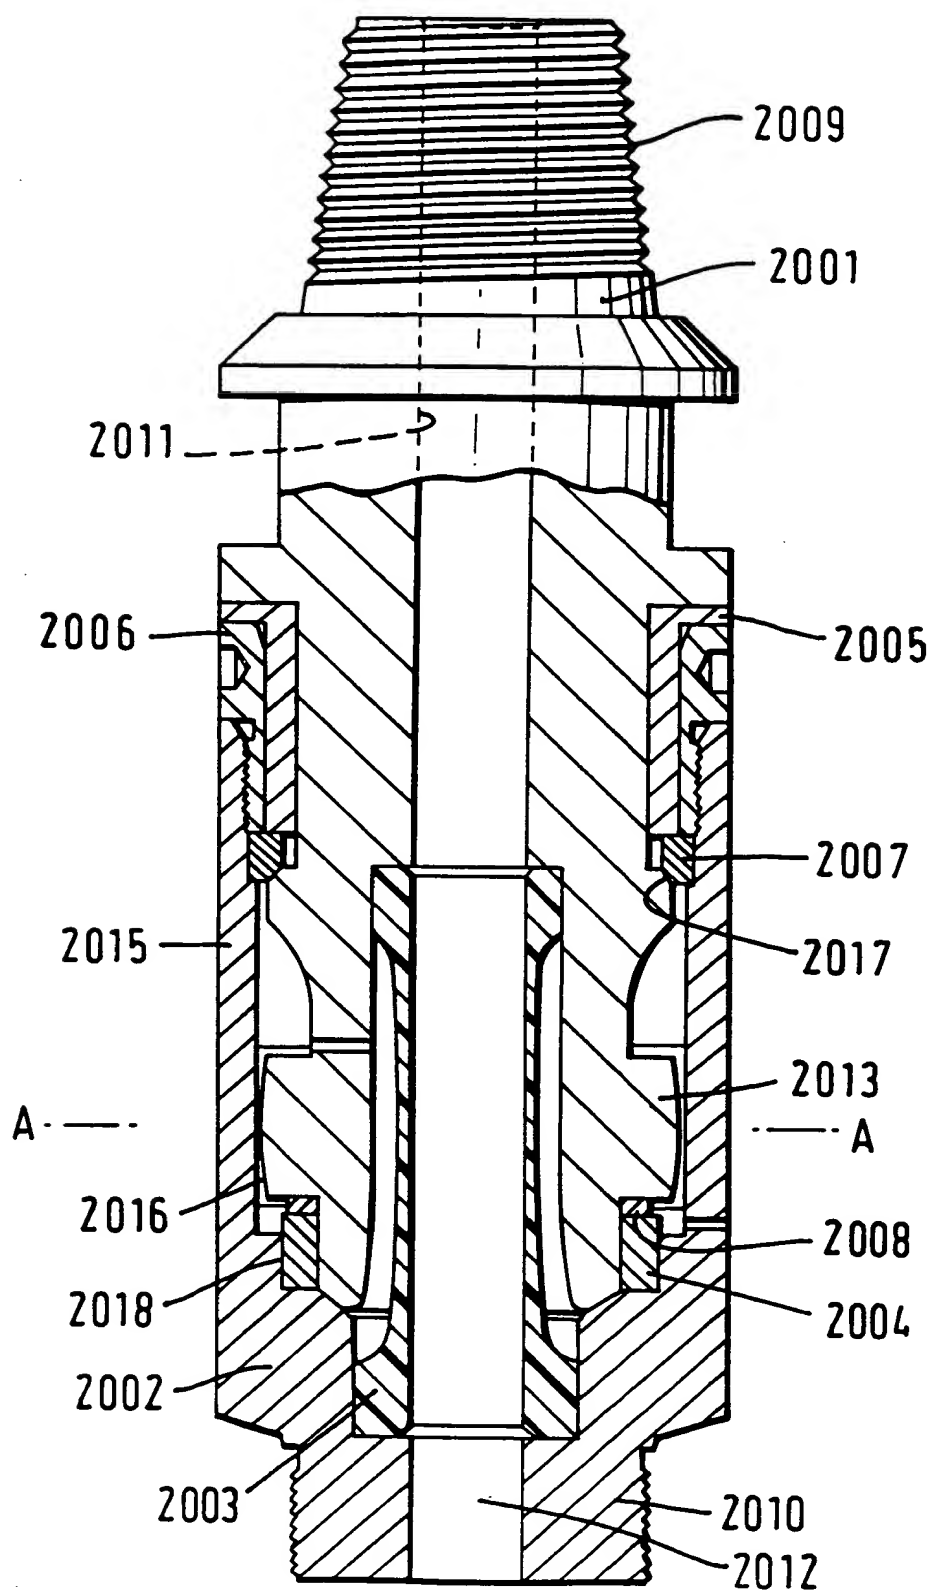


FIG. 12A

12/20


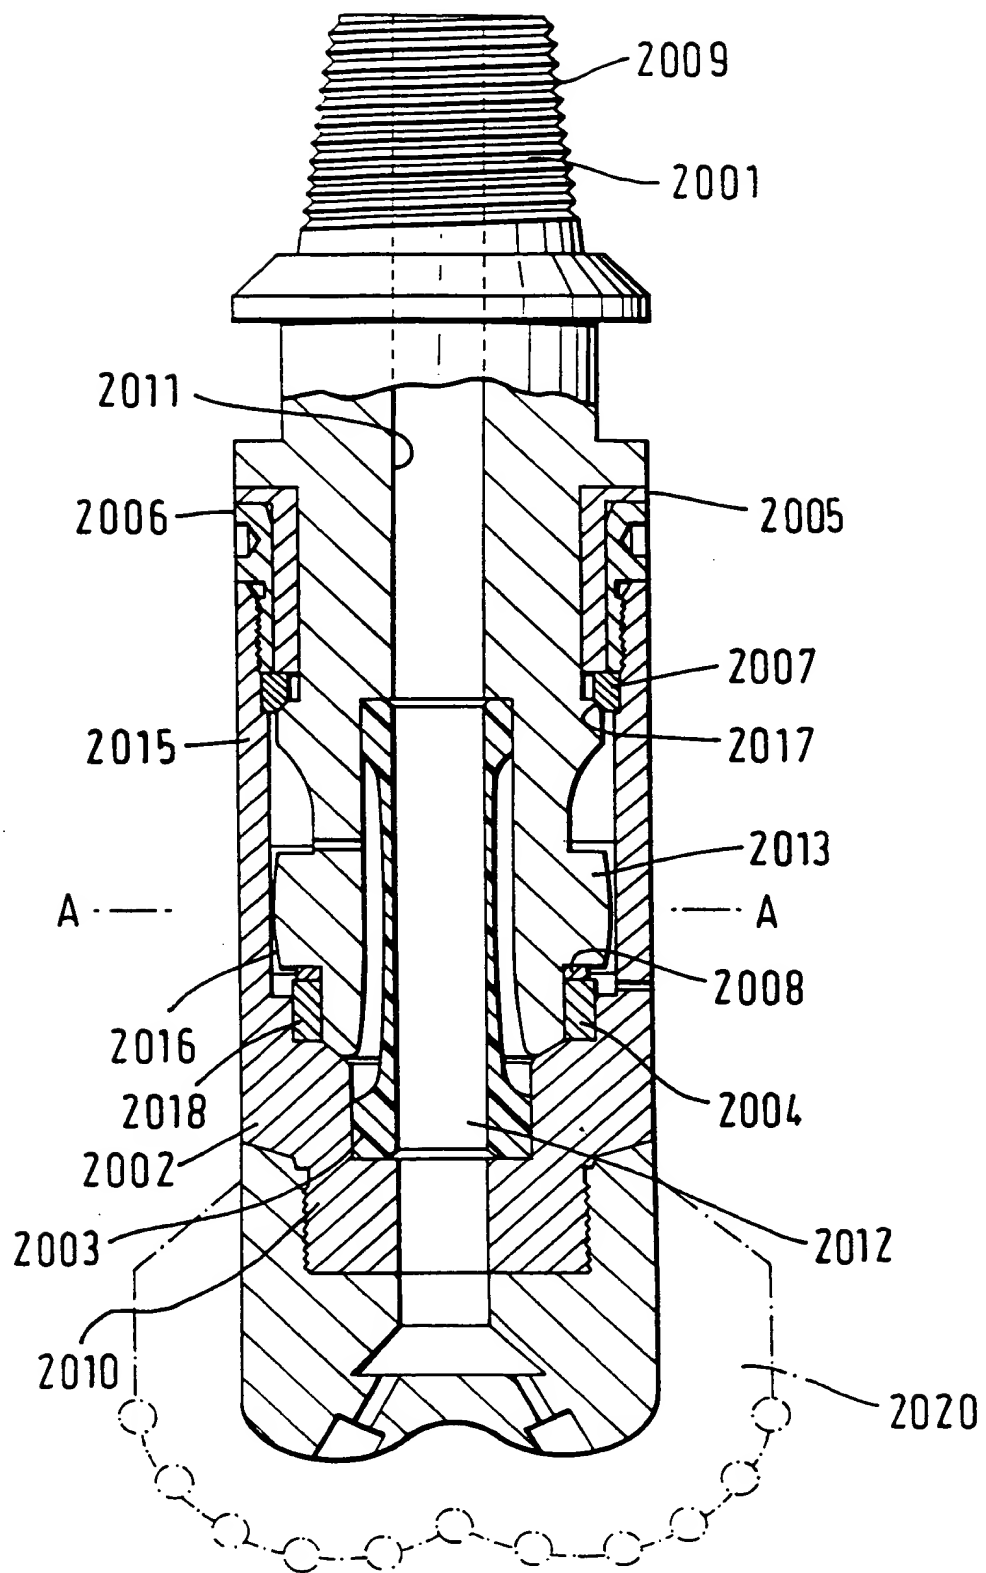



FIG. 12B

FIG. 12C

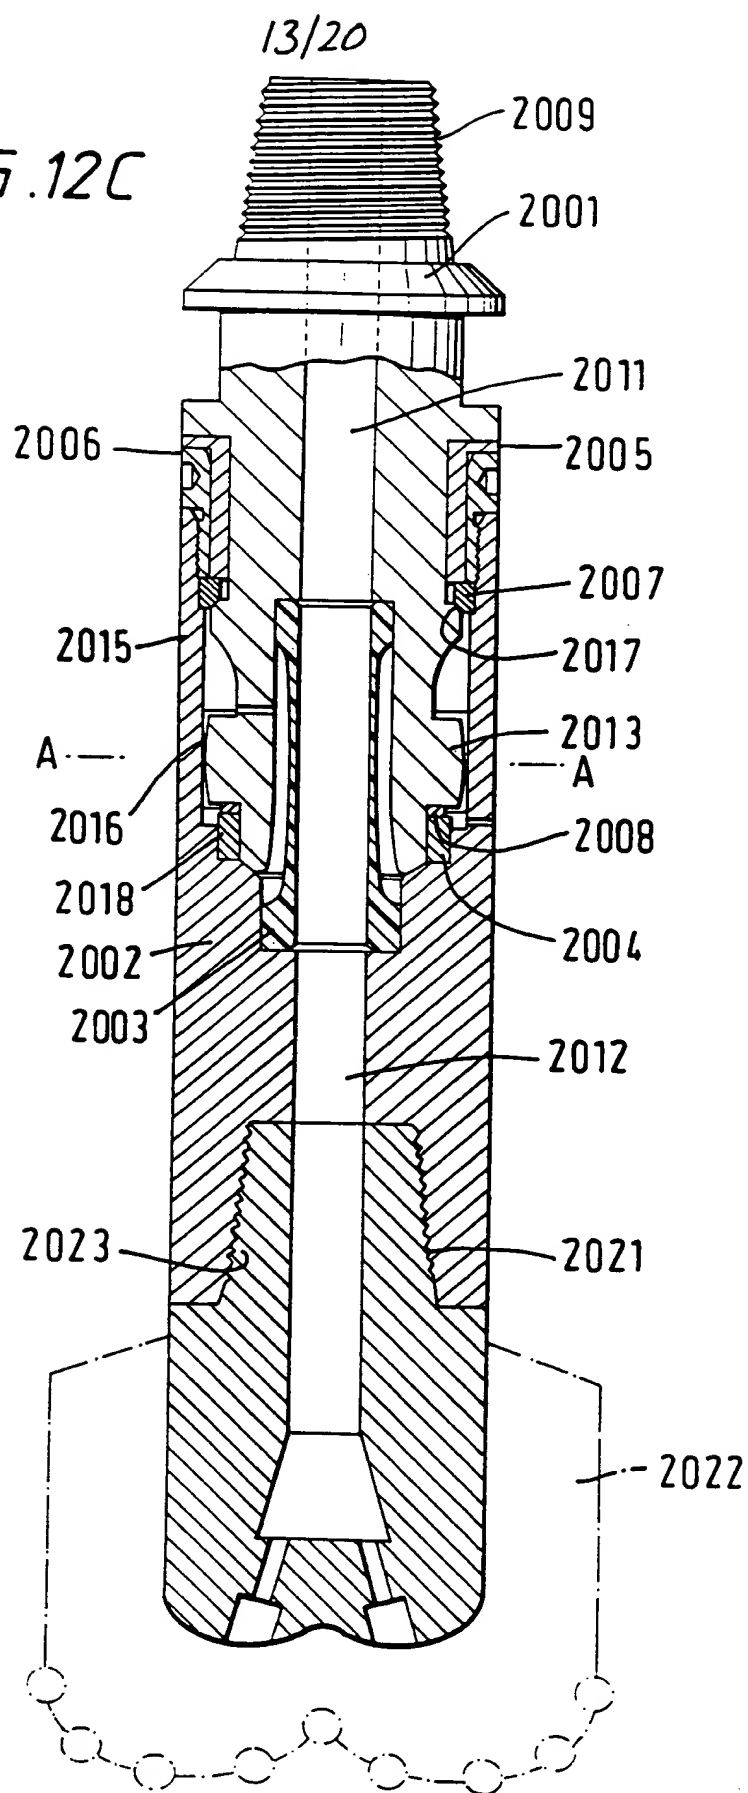

14/20

FIG. 12D

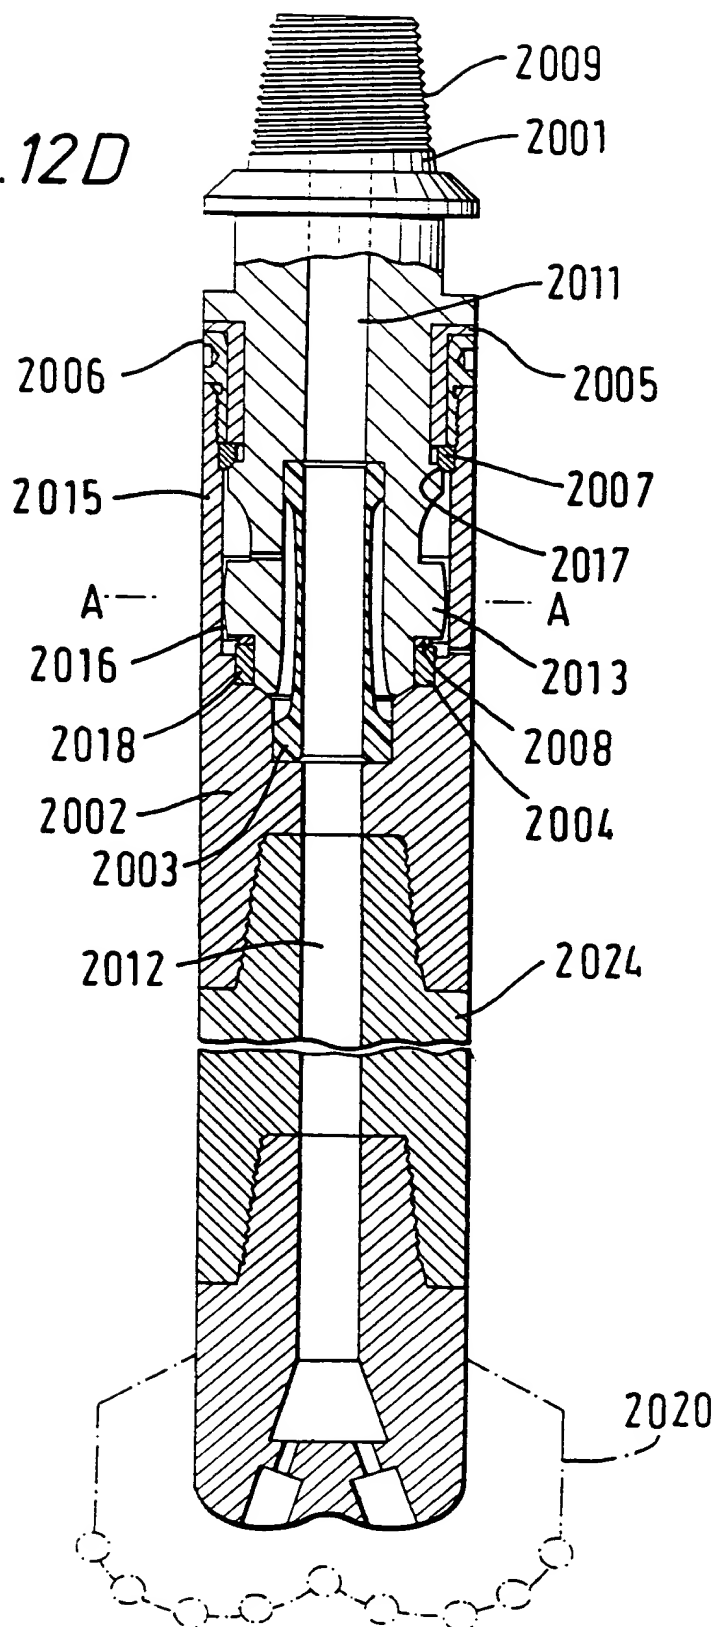

15/20

FIG. 13


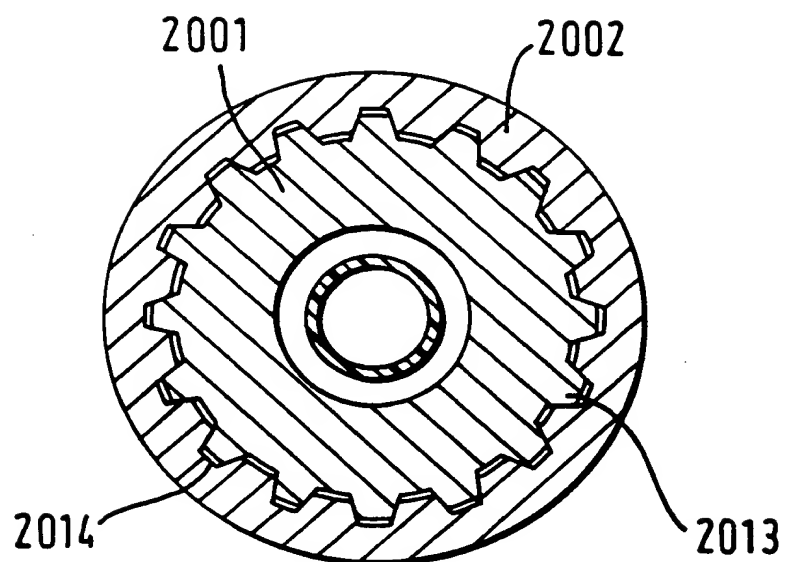


FIG. 14

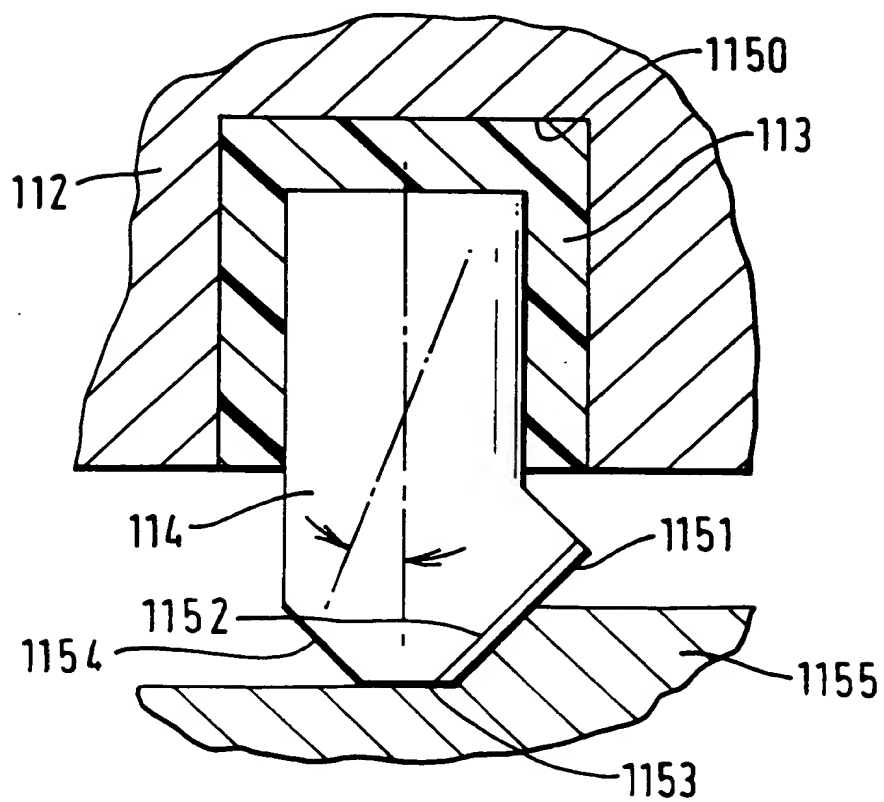

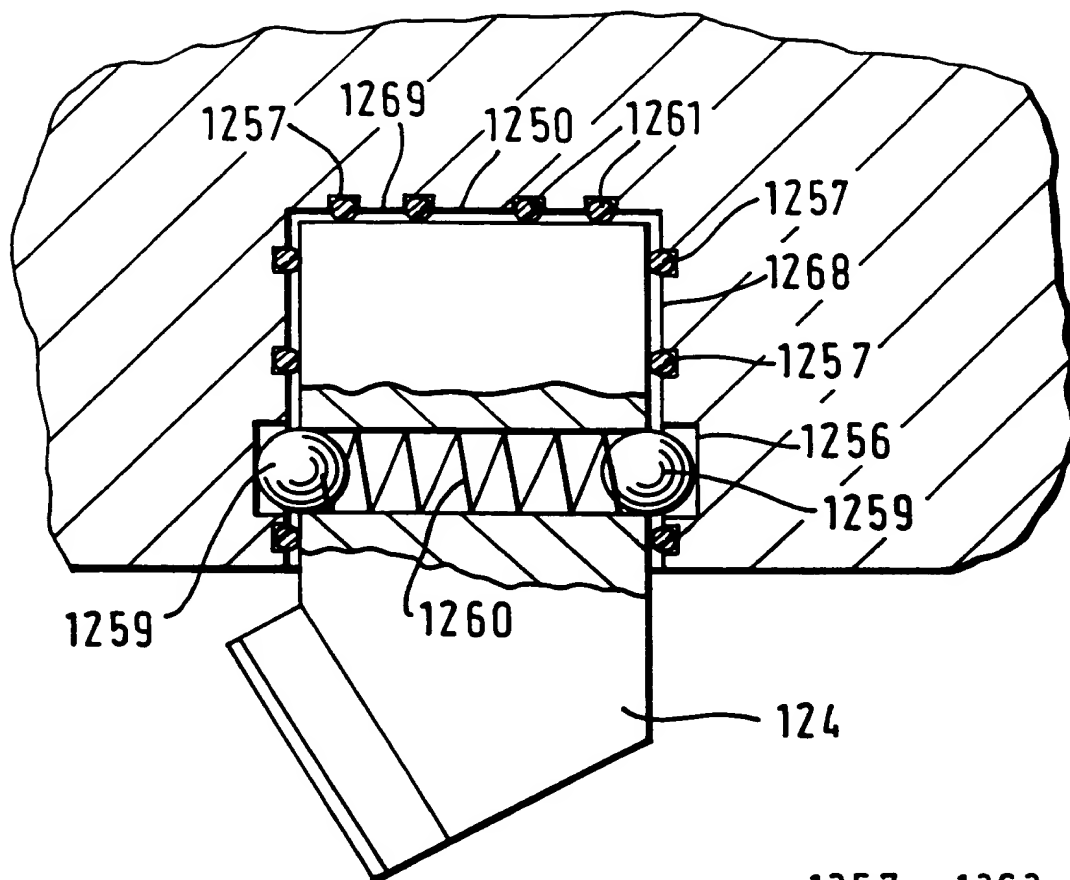
16/20
FIG. 15

FIG. 16

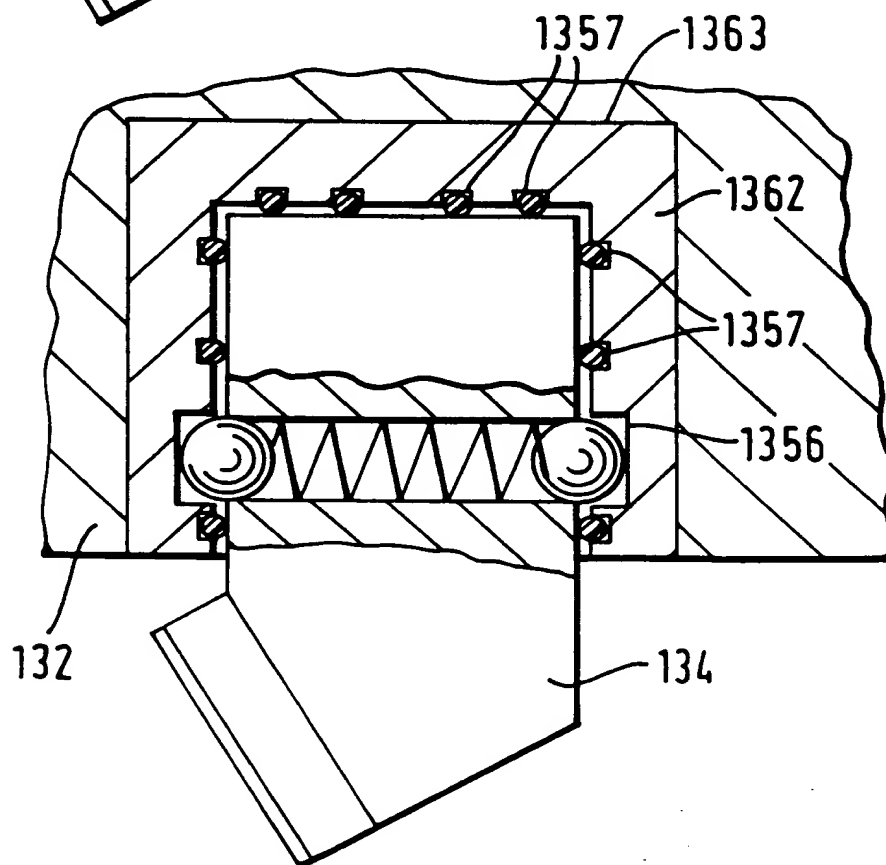


FIG. 17

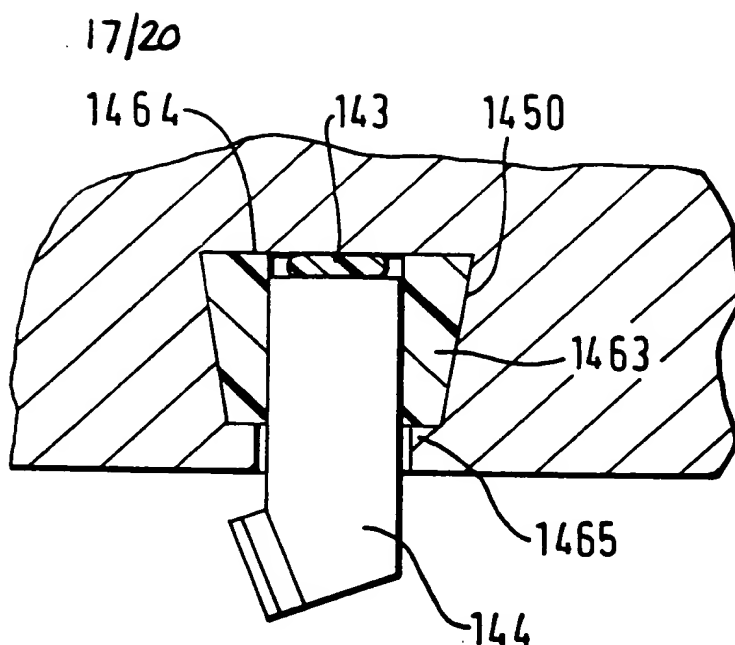


FIG. 18

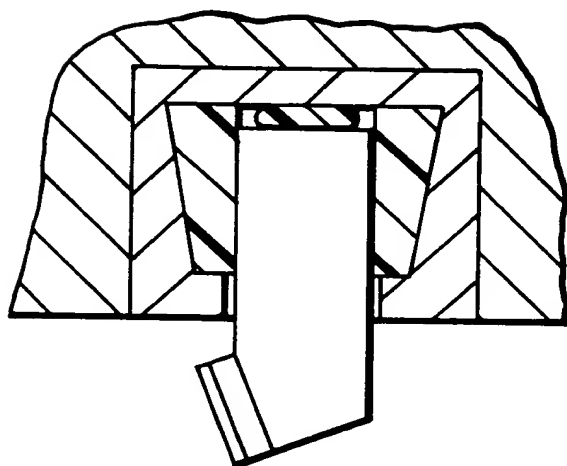


FIG. 19A


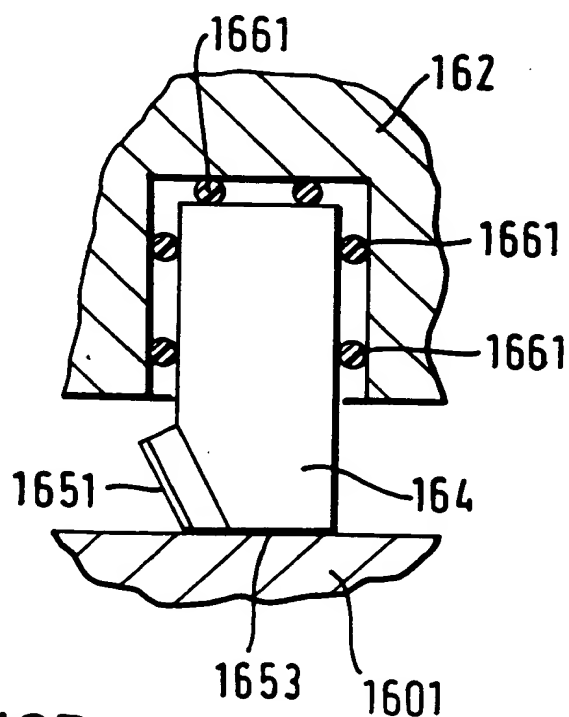


FIG. 19B

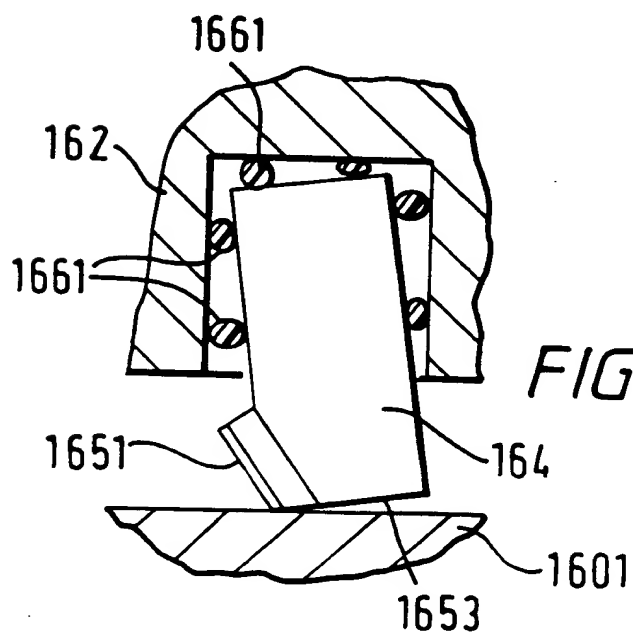

18/20

FIG. 20A

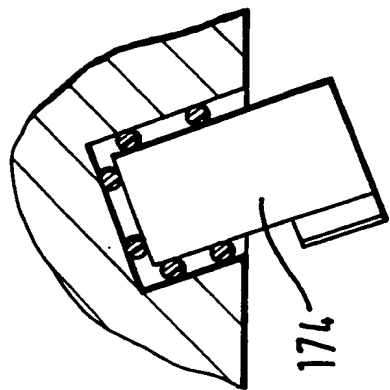


FIG. 20B

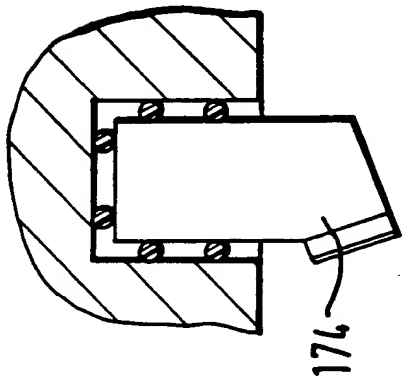


FIG. 20C

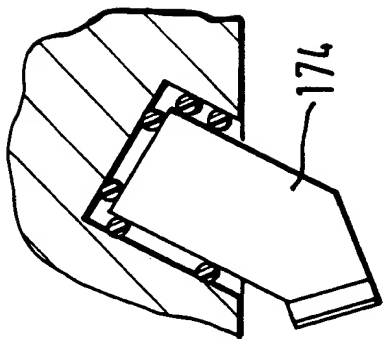


FIG. 20D


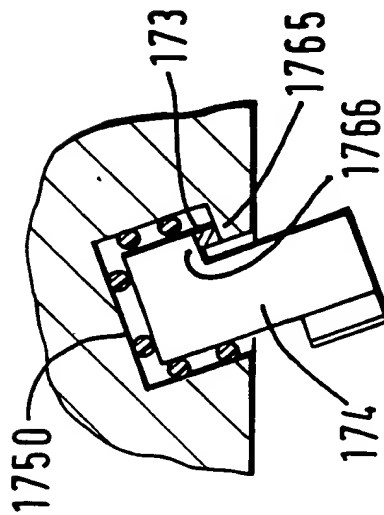


FIG. 20E

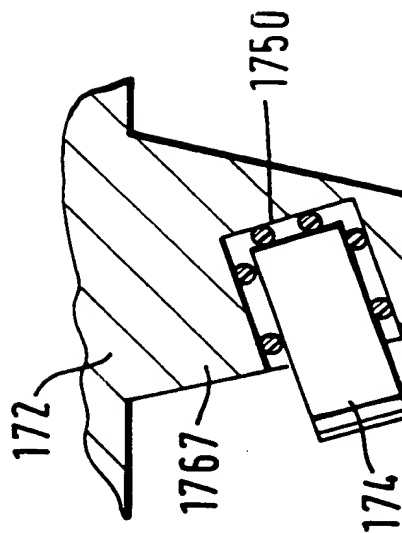

19/20


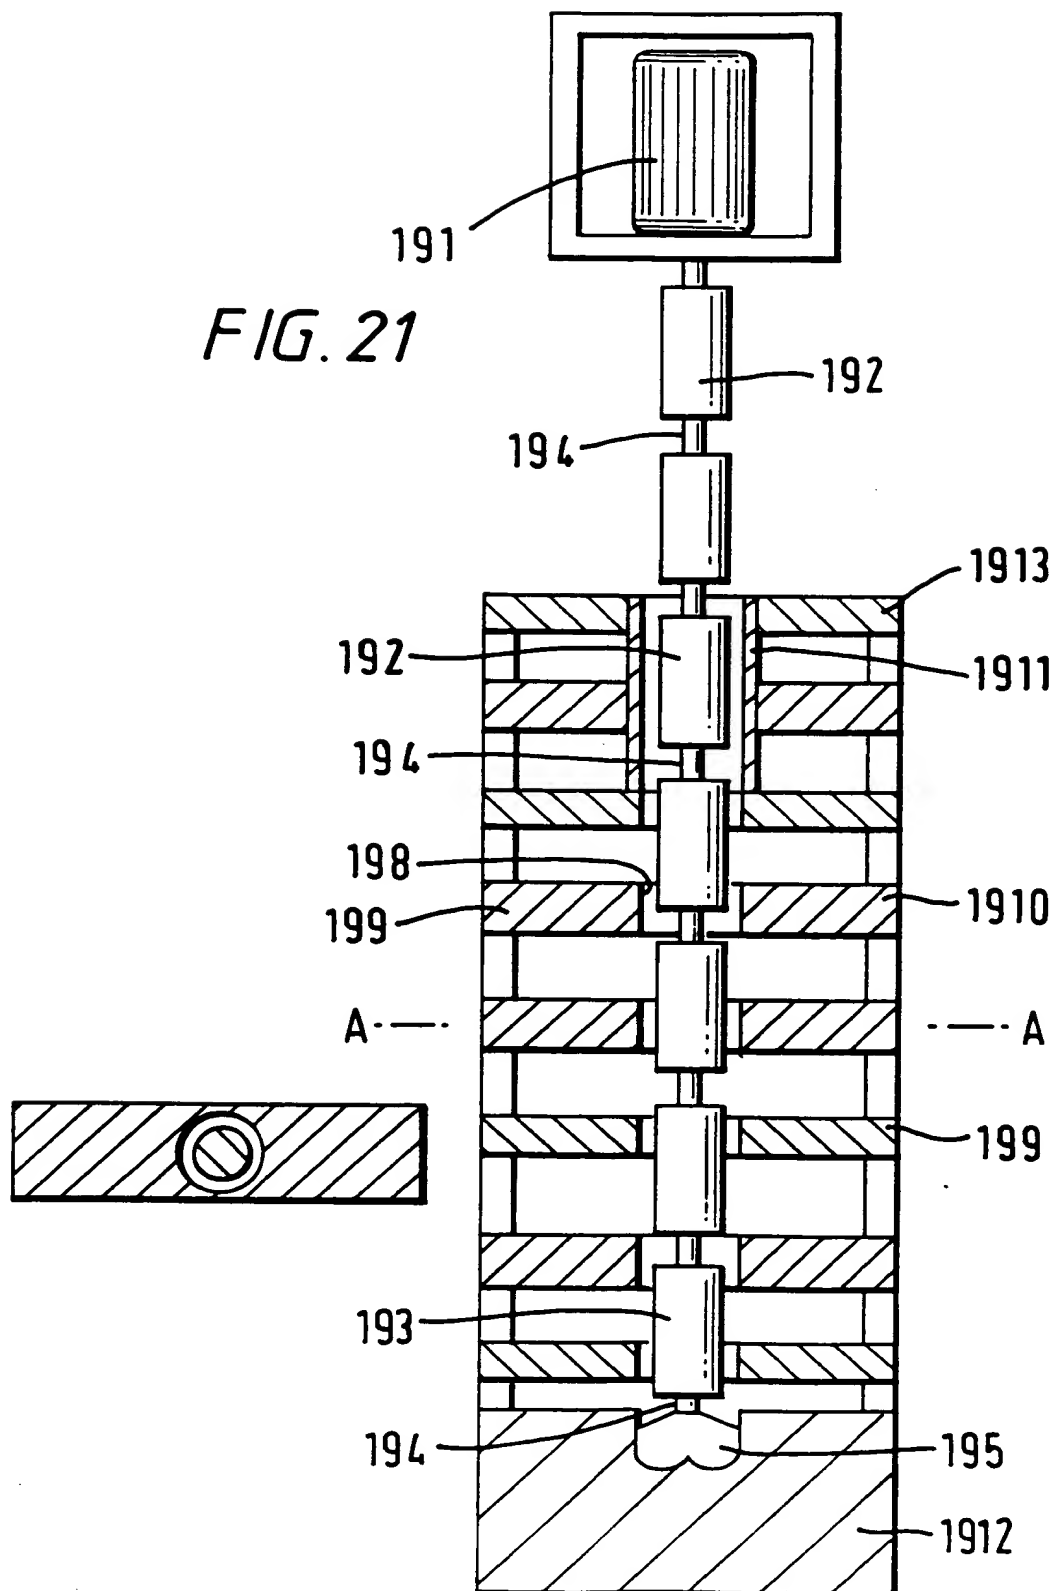


FIG. 22



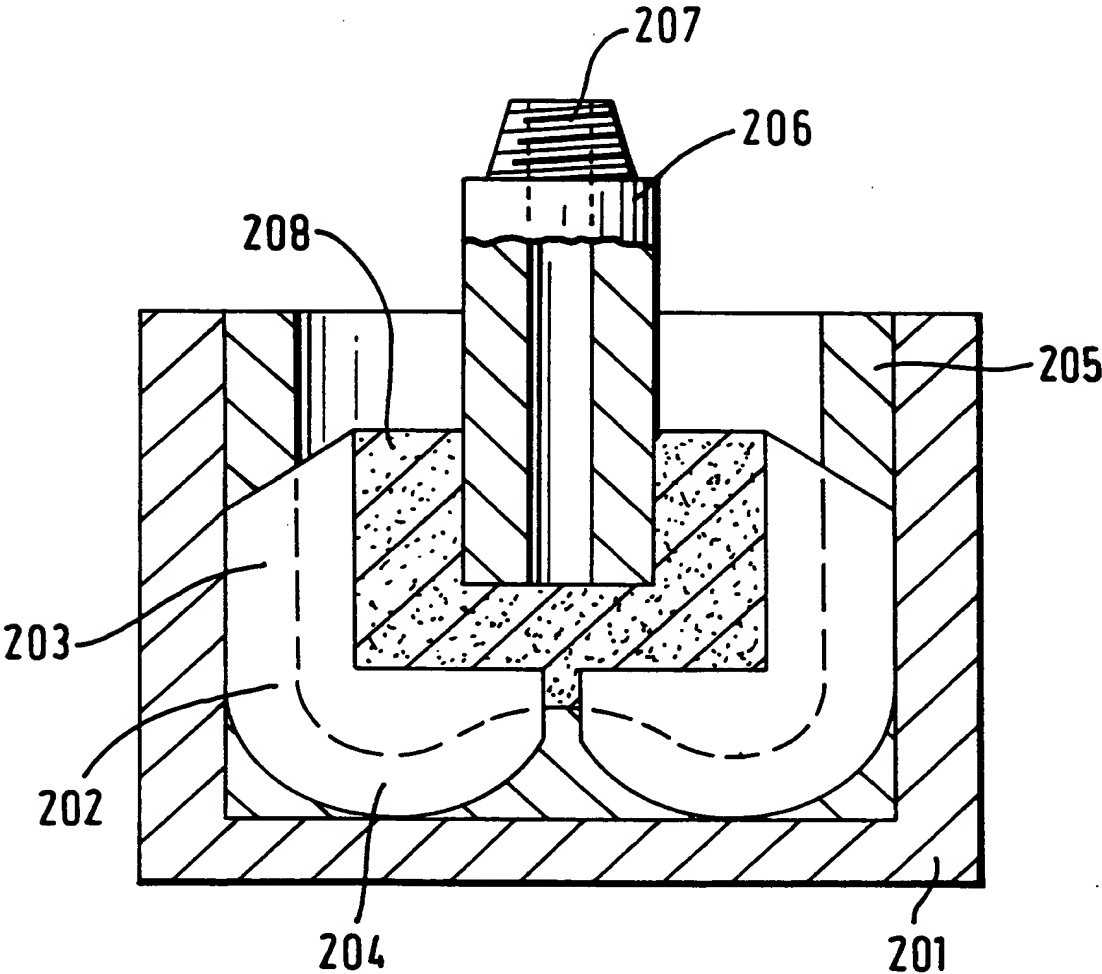


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E21B 17/05, 4/00, 10/62		A3	(11) International Publication Number: WO 95/21317
			(43) International Publication Date: 10 August 1995 (10.08.95)
(21) International Application Number: PCT/GB95/00181 (22) International Filing Date: 30 January 1995 (30.01.95) (30) Priority Data: 9402216.7 4 February 1994 (04.02.94) GB (71) Applicant (for all designated States except US): DB STRATABIT S.A. [BE/BE]; 74, avenue du Pont-de-Luttre, B-1190 Brussels (BE). (72) Inventors; and (75) Inventors/Applicants (for US only): DEFOURNY, Paul, Marie, Joseph, Louis, Vincent, Ghislain [BE/BE]; 50, rue Bois-du-Breucq, B-7110 La Louviere (BE). ABBASSIAN, Fereidoun [GB/GB]; Flat 2, 126 Goldhurst Terrace, London NW6 3HR (GB). (74) Agent: BEN-NATHAN, Laurence, Albert; Urquhart-Dykes & Lord, 91 Wimpole Street, London W1M 8AH (GB).		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> (88) Date of publication of the international search report: 21 September 1995 (21.09.95)	

(54) Title: DRILLING BIT ASSEMBLY AND APPARATUS

(57) Abstract

A drill bit comprises a shank member (31), a bit body (32) provided with cutters (33) and flexible material (35) between the shank (31) and the bit body (32) allowing relative tilting movement therebetween to reduce adverse effects caused by vibration of the bit. In other embodiments, flexible material is provided between the bit body and the cutters. In further embodiments, the flexible material may be provided in a tiltable sub-assembly for incorporation in a drill-string above the drill bit. An apparatus for simulating drilling conditions is also provided.

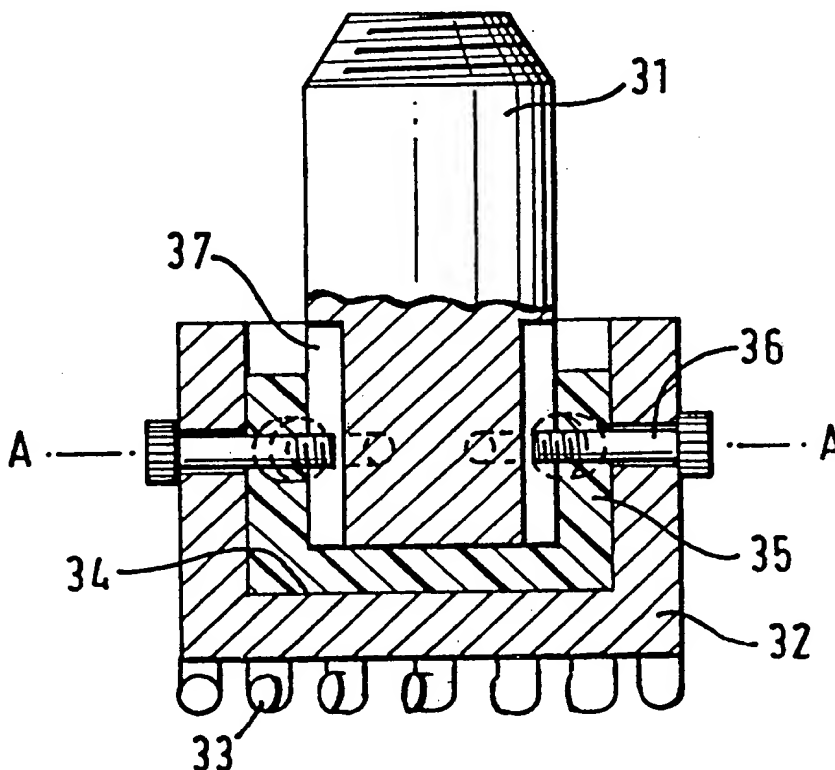

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 95/00181

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 6 E21B17/05 E21B4/00 E21B10/62

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 6 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US,A,4 261 425 (BODINE) 14 April 1981	1-10, 15-18, 22,25, 27, 32-34, 38-41 42
A	see the whole document ---	
X	US,A,4 904 228 (FREAR) 27 February 1990	1-7,9, 11,16, 32-41
Y	see the whole document	8,10,12, 13,30 42
A	---	
Y	EP,A,0 283 980 (EASTMAN CHRISTENSEN CO.) 28 September 1988 see abstract; figures ---	8,10,30
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* & * document member of the same patent family

Date of the actual completion of the international search

14 August 1995

Date of mailing of the international search report

22. 08. 95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+ 31-70) 340-3016

Authorized officer

Fonseca Fernandez, H

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 95/00181

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US,A,4 141 225 (H.M. VARNER) 27 February 1979 see abstract; figures ---	12,13
X	DE,A,41 23 639 (HECKE,F.J.) 21 January 1993 see abstract; figures ---	1,34
A		42
X	US,A,4 449 953 (S.S.NIKOMAROV) 22 May 1984 see figures ---	1,7,11, 34
A		42
X	US,A,4 446 935 (SCHUMACHER P.W.) 8 May 1984 see column 4; figure 5 ---	1,34
A		42
A	FR,A,2 390 618 (LAMOURIC P.) 8 December 1978 ---	
A	EP,A,0 379 584 (VSESOJUZNY) 1 August 1990 ---	
A	US,A,4 199 035 (THOMPSON) 22 April 1980 -----	

INTERNATIONAL SEARCH REPORT

International application No.

PCT/GB95/00181

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. A drill bit apparatus allowing tilting or lateral movement of 1st and 2nd members (claims 1-41).
 2. A method and apparatus for simulating in the laboratory downhole drilling conditions (claims 42-49).
-
1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
 2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
 3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
 4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 95/00181

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-4261425	14-04-81	US-A- 4266619	12-05-81
US-A-4904228	27-02-90	NONE	
EP-A-0283980	28-09-88	DE-C- 3709840 CA-A- 1300592 US-A- 4854401	29-09-88 12-05-92 08-08-89
US-A-4141225	27-02-79	AU-B- 520389 AU-A- 3316278 DE-A- 2805679 FR-A, B 2380463 GB-A- 1562570	28-01-82 16-08-79 17-08-78 08-09-78 12-03-80
DE-A-4123639	21-01-93	NONE	
US-A-4449953	22-05-84	SU-A- 1012647 CA-A- 1177819 DE-A- 3136110 FR-A, B 2490300 GB-A, B 2085550 JP-C- 1383582 JP-A- 57083722 JP-B- 61047328 NL-A- 8104187 SE-B- 448397 SE-A- 8105393	23-02-84 13-11-84 08-04-82 19-03-82 28-04-82 09-06-87 25-05-82 18-10-86 01-04-82 16-02-87 13-03-82
US-A-4446935	08-05-84	NONE	
FR-A-2390618	08-12-78	DE-A- 2820380 GB-A- 1602697	23-11-78 11-11-81
EP-A-0379584	01-08-90	AU-B- 612270 AU-A- 3688089 JP-T- 4500101 WO-A- 8911580 US-A- 5004056	04-07-91 12-12-89 09-01-92 30-11-89 02-04-91
US-A-4199035	22-04-80	NONE	


PATENT COOPERATION TREATY

From the
INTERNATIONAL PRELIMINARY EXAMINING AUTHORITY

PCT

To:

BEN-NATHAN, Laurence Albert
URQUHART-DYKES & LORD
91 Wimpole Street
LONDON W1M 8AH
GRANDE BRETAGNE



NOTIFICATION OF TRANSMITTAL OF INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Rule 71.1)

Date of mailing
(day/month/year)

22.04.95

Applicant's or agent's file reference

LBN/P81281 WO

IMPORTANT NOTIFICATION

International application No.

PCT/GB 95/00181

International filing date (day/month/year)

30/01/1995

Priority date (day/month/year)

04/02/1994

Applicant

DB STRATABIT SA et al.

1. The applicant is hereby notified that this International Preliminary Examining Authority transmits herewith the international preliminary examination report and its annexes, if any, established on the international application.

2. A copy of the report and its annexes, if any, is being transmitted to the International Bureau for communication to all the elected Offices.

3. Where required by any of the elected Offices, the International Bureau will prepare an English translation of the report (but not of any annexes) and will transmit such translation to those Offices.

4. REMINDER

The applicant must enter the national phase before each elected Office by performing certain acts (filing translations and paying national fees) within 30 months from the priority date (or later in some Offices)(Article 39(1))(see also the reminder sent by the International Bureau with Form PCT/IB/301).

Where a translation of the international application must be furnished to an elected Office, that translation must contain a translation of any annexes to the international preliminary examination report. It is the applicant's responsibility to prepare and furnish such translation directly to each elected Office concerned.

For further details on the applicable time limits and requirements of the elected Offices, see Volume II of the PCT Applicant's Guide.

Name and mailing address of the IPEA/



European Patent Office
D-80298 Munich
Tel. (+49-89) 2399-0, Tx: 523656 cpmu d
Fax: (+49-89) 2399-4465

Authorized officer

Luigi Schnauder

Telephone No.

PATENT COOPERATION TREATY

PCT



INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference LBN/P81281 WO	<div style="display: flex; justify-content: space-between;"> <div>FOR FURTHER ACTION</div> <div>See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)</div> </div>	
International application No. PCT/GB 95/ 00181	International filing date (<i>day/month/year</i>) 30/01/1995	Priority date (<i>day/month/year</i>) 04/02/1994
International Patent Classification (IPC) or national classification and IPC E21B17/05		
Applicant DB STRATABIT SA et al.		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.
2. This **REPORT** consists of a total of 4 sheets, including this cover sheet.
- ☒ This report is also accompanied by **ANNEXES**, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).
- These annexes consists of a total of 7 sheets.

3. This report contains indications and corresponding pages relating to the following items:
- I ☒ Basis of the report
 - II ☐ Priority
 - III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
 - IV ☒ Lack of unity of invention
 - V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
 - VI ☐ Certain documents cited
 - VII ☐ Certain defects in the international application
 - VIII ☐ Certain observations on the international application

Date of submission of the demand 24/08/1995	Date of completion of this report 2 2. 04. 96
Name and mailing address of the IPEA/  European Patent Office D-80298 Munich Tel. (+49-89) 2399-0, Tx: 523656 epmu d Fax: (+49-89) 2399-4465	Authorized officer  G. Hedemann Telephone No.

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

I. Basis of the report

1. This report has been drawn up on the basis of (Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments.):

☐ the international application as originally filed.

☒ the description, pages 1-27 _____, as originally filed,
pages _____, filed with the demand,
pages _____, filed with the letter of _____,
pages _____, filed with the letter of _____,

☒ the claims, Nos. _____, as originally filed,
Nos. _____, as amended under Article 19,
Nos. _____, filed with the demand,
Nos. 1-46 _____, filed with the letter of 19/01/96,
Nos. _____, filed with the letter of _____,

☒ the drawings, sheets/fig 1/20-20/20 _____, as originally filed,
sheets/fig _____, filed with the demand,
sheets/fig _____, filed with the letter of _____,
sheets/fig _____, filed with the letter of _____.

2. The amendments have resulted in the cancellation of:

☐ the description, pages _____.

☐ the claims, Nos. _____.

☐ the drawings, sheets/fig _____.

3. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

4. Additional observations, if necessary:

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

IV. Lack of unity of invention

1. In response to the invitation to restrict or pay additional fees the applicant has:

- ☐ restricted the claims.
- ☒ paid additional fees.
- ☐ paid additional fees under protest.
- ☐ neither restricted nor paid additional fees.

2. ☐ This Authority found that the requirement of unity of invention is not complied with and chose, according to Rule 68.1, not to invite the applicant to restrict or pay additional fees.

3. This Authority considers that the requirement of unity of invention in accordance with Rules 13.1, 13.2 and 13.3 is

- ☐ complied with.
- ☐ not complied with for the following reasons:

4. Consequently, the following parts of the international application were the subject of international preliminary examination in establishing this report:

☒ all parts.

☐ the parts relating to claims Nos. _____.

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

Intern. application No.

PCT/GB95/00181

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step and industrial applicability; citations and explanations supporting such statement

1. STATEMENT

Novelty (N)	Claims 1-46 _____	YES
	Claims _____	NO
Inventive Step (IS)	Claims 1-46 _____	YES
	Claims _____	NO
Industrial Applicability (IA)	Claims 1-46 _____	YES
	Claims _____	NO

2. CITATIONS AND EXPLANATIONS

1. The document US-A-4261425 discloses the preamble of claim 1 whereas document US-A-4904228 discloses the preamble of claim 32. The problem underlying the invention is to provide a drill bit or a subassembly which is dynamically more stable and drill a less eccentric hole.

This problem is solved by the characterizing features of independent claims 1 and 32.

An apparatus for simulating drilling according to independent claim 42 and the use of such an apparatus in simulating downhole drilling conditions has not been disclosed in any of the cited documents.

CLAIMS

1. Apparatus for a drill bit which is suitable for use in drilling, coring or removing material from a geological subsurface formation, which apparatus comprises a first member (21) for attachment directly or indirectly to a drill string, and a second member (22) carrying or constituting at least one means for drilling (23), said first member (21) being in torque and weight transmitting relation with said second member (22) and elastically or resiliently deformable connecting means (25) being provided between said first and second members (21,22) to allow said first and second members (21,22) to be tilted with respect to one another, characterized in that said second member (22) is connected by said connecting means (25) to said first member (21) in a free floating relation thereto allowing said second member (22) to tilt and move laterally with respect to said first member (21) solely in response to reaction forces experienced, in use, by said drilling means (23).

2. Apparatus according to Claim 1, in the form of a sub-assembly (2001,2002) for incorporation within a drill bit.

3. Apparatus according to Claim 2, wherein a drill bit body (2020) is integral with the second member (2002) with said first member (2001) constituting a drive shank of the drill bit.

4. Apparatus according to Claim 1, wherein said first member (21) constitutes the shank of a drill bit, and said second member (22) constitutes a drill bit body which carries at least one means (23) for drilling.

5. Apparatus according to any one of Claims 1 - 4, including means (46) for holding said first and second members

(41,42) together and for transferring torque and weight from said first to said second member.

6. Apparatus according to Claim 1, wherein said second member (32) is tiltable or laterally movable with respect to said first member (31) against elastically or resiliently compressible means (35) between said first and second members.

7. Apparatus according to Claim 1 wherein said first and second members (41,42) have a cooperating passage (412) therein.

8. Apparatus according to Claim 7 which comprises compressible sealing means (45) between said first and second members to prevent escape of fluid from said passage (412) between said members.

9. Apparatus according to Claim 5 wherein said holding means and torque transfer means together comprise at least one elongate member (36) passing through said second member (32) and engaging in at least one recess or slot (37) in said first member (31).

10. Apparatus according to Claim 5 wherein said torque transfer means comprises grooves or recesses (617) in one of said first and second member (61,62) engaging corresponding gear components (618) in the other of said first and second members.

11. Apparatus according to Claim 10 wherein said holding means comprises a threaded locking ring (619) surrounding said first member (61) and engaging threads (620) on said second member (62).

12. Apparatus according to Claim 7 which comprises a first member having a first elongate conduit (812) therethrough cooperating with conduit means in said second

member (82), said first conduit and said second conduit means being in fluid contact by way of a flexible pipe (825).

13. Apparatus according to Claim 7, wherein fluid passage means (3004,3005) is provided through said first member (3001), and wherein conduit extension means (3006) are provided at outlet ends of said fluid passage means (3005) on said first member to extend through said second member so as to discharge fluid below the second member without exerting a downward fluid force thereon.

14. Apparatus according to Claim 1 wherein said first member constitutes a drill bit body (112) and said second member constitutes at least one means (114) for cutting, which is carried by the drill bit body (112).

15. Apparatus according to Claim 14 wherein said cutting means comprises at least one cutter (114) which is tiltable with respect to said drill bit body (112).

16. Apparatus according to Claim 15 wherein said cutter (114) is adhered to said drill bit body (112) by an elastomeric spacer (113).

17. Apparatus according to Claim 15 wherein said cutter (124) comprises a stud, which is in a socket (1250) in said drill bit body with means (1259,1260) to restrain removal of said stud from said socket, and at least one spacer (1261) allowing tilting of said cutter with respect to said drill bit body.

18. Apparatus according to Claim 17 wherein said socket (1362) is in a separate member from said drill bit body (132), said member itself being in a hole (1363) in said drill bit body (132).

AMENDED SHEET

19. Apparatus according to Claim 17 wherein said restraining means comprises an elastomeric stud catcher (1463) in a socket (1450) which is of outwardly decreasing diameter.

20. Apparatus according to Claim 6 or Claim 8 wherein said compressible means comprises an elastomeric spacer (35,45) between at least part of said first and second members (31,32; 41,42).

21. Apparatus according to Claim 20 wherein said elastomer is at least one of a hydrogenated nitrile rubber, a nitrile rubber and a polyurethane, and has a Shore A hardness of at least 80.

22. Apparatus according to Claim 20 wherein said spacer comprises an elastomer derived from a settable liquid set in situ.

23. Apparatus according to Claim 20 wherein said spacer is a preformed ring or gasket.

24. Apparatus according to Claim 20 wherein said spacer is a layered body with at least one layer of elastomer and at least one layer of metal.

25. Apparatus according to Claim 16 or Claim 20 wherein said spacer is at least 0.3 mm thick.

26. Apparatus according to Claim 6 or Claim 8 wherein said compressible means comprises a hollow body (932) adapted to contain a compressible fluid.

27.. Apparatus according to Claim 26 wherein said compressible means (932) is adapted to provide torque transfer means between said first and second members (91,92).

28. Apparatus according to any one of Claims 1 - 4 or Claim 13 wherein said second member is tiltable relative to said first member against a hollow cylinder or spring.

29. Apparatus according to Claim 1 wherein said means (25) is adapted to allow tilting of up to 15 degrees.

30. A drill bit including apparatus according to any one of Claims 1 - 5 or Claim 14.

31. A drill bit including at least one apparatus according to any one of Claims 2 - 4 together with an apparatus according to Claim 14.

32. A sub-assembly for incorporation in a drill string, said sub-assembly comprising a first member (2001) and a second member (2002) each for torque transmitting attachment to respective elements of the drill string to provide a rotary drive connection between those elements of the drill string, means (2007,2013,2014,2017) for transmitting weight and torque between the first and second members (2001,2002), and connecting means (2004,2005,2016) between said first and second members (2001,2002) allowing said first and second members to be tilted with respect to one another, characterized in that said second member (2002) is connected to said first member (2001) in a free floating relation thereto by elastically or resiliently deformable connecting means (2004,2005,2016) allowing said second member (2002) to tilt and move laterally with respect to said first member (2001) solely under an applied load to a drill bit driven, in use, by said drill string.

33.. A sub-assembly according to Claim 32 wherein said weight and torque transmitting means including a series of radial teeth (2013) on said first member (2001) which loosely engage in corresponding recesses (2014) in said second member (2002), with the radially outer surfaces (2016) of the teeth

AMENDED SHEET

(2013) and the opposed base surfaces of the recesses (2014) being shaped to allow said relative tilting or lateral movement of said first and second members (2001,2002).

34. A sub-assembly according to Claim 32 wherein said second member (2021) is formed with connector means (2021) for attachment thereto of a shank (2023) of a drill bit (2022).

35. A drill string including at least one sub-assembly according to any one of Claims 32 - 34.

36. The combination of a drill string according to Claim 35 and a drill bit, wherein at least one sub-assembly is disposed at a position spaced at a distance above the drill bit (2020).

37. The combination of a drill string according to Claim 35 and a drill bit according to Claim 30 or Claim 31.

38. A method of drilling, coring or removing material from a geological subsurface formation using a drill bit according to Claim 30 or Claim 31, or a drill string according to Claim 35 or a combination of a drill string and a drill bit according to Claim 36 or Claim 37.

39. An apparatus for simulating drilling which comprises (a) at least one rigid rotatable body (192) connected directly or indirectly to (b) a drill bit (195) for contacting a simulated bottom hole surface, and (c) means (191) for rotating said body and bit, wherein at least one of (a) and (b), and (a) and (c), is separated by a flexible connector (b), and (a) and (c), is separated by a flexible connector (194).

40. An apparatus according to Claim 39 which comprises at least two rigid bodies (a) (192,193) spaced from one another and from (b) and (c) by flexible connectors (194).

AMENDED SHEET

41. An apparatus according to Claim 39 wherein said body (a) (192) is a rigid cylinder threaded to a correspondingly threaded flexible connector (194).

42. An apparatus according to Claim 39 wherein said flexible connector comprises two plates each carrying a thread adapted to engage a rigid cylinder, said plates being separated by a flexible member.

43. An apparatus according to Claim 39 which also comprises a simulated bore hole comprising at least one bore member having a bore in which said rigid body (192) can rotate.

44. An apparatus according to Claim 39 which has one of its natural frequencies not greater than 10 Hz, preferably not greater than 1 Hz.

45. An apparatus according to Claim 39 which comprises an axial passage through all of said rotatable bodies (192,193), flexible connectors (194) and the drill bit (195).

46. A method of simulating downhole drilling conditions of a specific downhole location utilizing an apparatus according to Claim 39, including testing scale versions of downhole equipment to be used at said downhole location in said apparatus and altering the design of the equipment as necessary, in order to reach an optimized design of such equipment, and using the optimized design for the corresponding equipment to be used in practice at said downhole location.

PATENT COOPERATION TREATY

From the
INTERNATIONAL PRELIMINARY EXAMINING AUTHORITY

PCT

To:

BEN-NATHAN, Laurence Albert
URQUHART-DYKES & LORD
91 Wimpole Street
LONDON W1M 8AH
GRANDE BRETAGNE



NOTIFICATION OF TRANSMITTAL OF INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Rule 71.1)

Date of mailing
(day/month/year)

22.04.95

Applicant's or agent's file reference

LBN/P81281 WO

IMPORTANT NOTIFICATION

International application No.

PCT/GB 95/00181

International filing date (day/month/year)

30/01/1995

Priority date (day/month/year)

04/02/1994

Applicant

DB STRATABIT SA et al.

1. The applicant is hereby notified that this International Preliminary Examining Authority transmits herewith the international preliminary examination report and its annexes, if any, established on the international application.

2. A copy of the report and its annexes, if any, is being transmitted to the International Bureau for communication to all the elected Offices.

3. Where required by any of the elected Offices, the International Bureau will prepare an English translation of the report (but not of any annexes) and will transmit such translation to those Offices.

4. REMINDER

The applicant must enter the national phase before each elected Office by performing certain acts (filing translations and paying national fees) within 30 months from the priority date (or later in some Offices)(Article 39(1))(see also the reminder sent by the International Bureau with Form PCT/IB/301).

Where a translation of the international application must be furnished to an elected Office, that translation must contain a translation of any annexes to the international preliminary examination report. It is the applicant's responsibility to prepare and furnish such translation directly to each elected Office concerned.

For further details on the applicable time limits and requirements of the elected Offices, see Volume II of the PCT Applicant's Guide.

Name and mailing address of the IPEA/



European Patent Office
D-80298 Munich
Tel. (+49-89) 2399-0, Tx: 523656 epmu d
Fax: (+49-89) 2399-4465

Authorized officer

Luise Schnauder

Telephone No.